



## CE EMC Test Report

### (EN 50155 & EN 50121-3-2)

**Report No.:** CE151013D05

**Test Model:** ECS-4000-PoE

**Series Model:** Vecow ECS-4000 Series, ECS-4000-PoER, ECS-4000-2G, ECS-4000-2R, ECS-4500, ECS-4600, ECS-XXXXXXXXXXXXXXXXX  
("X" can be 0-9, A-Z or blank for marketing purpose)

**Received Date:** Oct. 13, 2015

**Test Date:** Oct. 14 ~ Dec. 25, 2015

**Issued Date:** Jan. 12, 2016

**Applicant:** Vecow Co., Ltd.

**Address:** 12F., No. 111, Zhongcheng Rd., Tucheng Dist., New Taipei City 23674  
Taiwan (R. O. C.)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
(R.O.C.)

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Performance Criteria .....	8
2.2 Measurement Uncertainty.....	8
2.3 Modification Record.....	8
<b>3 General Information</b> .....	<b>9</b>
3.1 Features of EUT.....	9
3.2 General Description of EUT .....	9
3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode.....	10
3.4 Test Program Used and Operation Descriptions.....	11
3.5 Primary Clock Frequencies of Internal Source .....	11
3.6 Miscellaneous .....	12
<b>4 Configuration and Connections with EUT</b> .....	<b>13</b>
4.1 Connection Diagram of EUT and Peripheral Devices .....	13
4.2 Configuration of Peripheral Devices and Cable Connections.....	15
<b>5 Conducted Disturbance at Auxiliary a.c. or d.c. Power Ports</b> .....	<b>17</b>
5.1 Limits .....	17
5.2 Test Instruments.....	17
5.3 Test Arrangement.....	18
5.4 Test Results.....	19
<b>6 Radiated Disturbance up to 1 GHz</b> .....	<b>21</b>
6.1 Limits .....	21
6.2 Test Instruments.....	21
6.3 Test Arrangement.....	22
6.4 Test Results.....	23
<b>7 Electrostatic Discharge Immunity Test (ESD)</b> .....	<b>25</b>
7.1 Test Specification.....	25
7.2 Test Instruments.....	25
7.3 Test Arrangement.....	26
7.4 Test Results.....	27
<b>8 Radio-frequency Electromagnetic Field Immunity Test (RS)</b> .....	<b>30</b>
8.1 Test Specification.....	30
8.2 Test Instruments.....	30
8.3 Test Arrangement.....	31
8.4 Test Results.....	32
<b>9 Electrical Fast Transient/Burst Immunity Test (EFT)</b> .....	<b>33</b>
9.1 Test Specification.....	33
9.2 Test Instruments.....	33
9.3 Test Arrangement.....	34
9.4 Test Results.....	35
<b>10 Surge Immunity Test</b> .....	<b>36</b>
10.1 Test Specification.....	36
10.2 Test Instruments.....	36
10.3 Test Arrangement.....	36
10.4 Test Results.....	37



<b>11 Immunity to Conducted Disturbances Induced by RF Fields (CS)</b> .....	<b>38</b>
11.1 Test Specification.....	38
11.2 Test Instruments.....	38
11.3 Test Arrangement.....	39
11.4 Test Results.....	40
<b>12 Pictures of Test Arrangements</b> .....	<b>41</b>
12.1 Conducted Disturbance at Auxiliary a.c. or d.c. power ports.....	41
12.2 Radiated Disturbance up to 1 GHz.....	42
12.3 Electrostatic Discharge Immunity Test (ESD).....	43
12.4 Radio-frequency Electromagnetic Field Immunity Test (RS).....	44
12.5 Fast Transients (EFT).....	45
12.6 Surge.....	47
12.7 Radio-frequency common mode (CS).....	48
<b>Appendix – Information on the Testing Laboratories</b> .....	<b>50</b>



### Release Control Record

Issue No.	Description	Date Issued
CE151013D05	Original release.	Jan. 12, 2016



1 Certificate of Conformity

**Product:** Ultra Compact Embedded System

**Brand:** Vecow

**Test Model:** ECS-4000-PoE

**Series Model:** Vecow ECS-4000 Series, ECS-4000-PoER, ECS-4000-2G, ECS-4000-2R, ECS-4500, ECS-4600, ECS-XXXXXXXXXXXXXXXXX  
("X" can be 0-9, A-Z or blank for marketing purpose)

**Sample Status:** Engineering sample

**Applicant:** Vecow Co., Ltd.

**Test Date:** Oct. 14 ~ Dec. 25, 2015

**Standards:** **EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.7 & 12.2.8**  
**EN 50121-1:2006 +AC:2008**  
**EN 50121-3-2:2006 +AC:2008**  
 EN 55011:2009 +A1:2010  
 EN 61000-4-2:2009  
 EN 61000-4-3:2006 +A1:2008 +A2:2010  
 EN 61000-4-4:2012  
 EN 61000-4-5:2006  
 EN 61000-4-6:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Celia Chen , **Date:** Jan. 12, 2016  
 Celia Chen / Supervisor

**Approved by :** Henry Lai , **Date:** Jan. 12, 2016  
 Henry Lai / Director

## 2 Summary of Test Results

EN 50121-3-2:2006 + AC:2008, Emission EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.8.2					
Table Clause	Basic Standard	Port	Test Item / specifications	Result/Remarks	Verdict
3.1	EN 55011:2009 +A1:2010	Auxiliary a.c. or d.c. power ports	Conducted disturbance 9 kHz-150 kHz: no limits 150 kHz- 500 kHz: 99 dB $\mu$ V quasi-peak 500 kHz- 30 MHz: 93 dB $\mu$ V quasi-peak	Minimum passing margin is -44.73 dB at 0.22812 MHz	Pass
6.1	EN 55011:2009 +A1:2010	Enclosure	Radiated disturbance 30 MHz- 230 MHz: 40 dB $\mu$ V/m quasi-peak 230 MHz -1 GHz: 47 dB $\mu$ V/m quasi-peak	Minimum passing margin is -3.21 dB at 999.99 MHz	Pass

EN 50121-3-2:2006 + AC:2008, Immunity requirements EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.7 & 12.2.8.1					
Table Clause	Basic standard	Port	Test Item / specifications	Result/Remarks	Verdict
7.1	EN 61000-4-6:2014	Auxiliary a.c. power input ports (rated voltage $\leq$ 400 Vrms)	Radio-frequency common mode (CS) 80% AM (1kHz) 0.15-80 MHz, 10V Performance Criterion A	Performance Criterion A	Pass
7.2	EN 61000-4-4:2012	Auxiliary a.c. power input ports (rated voltage $\leq$ 400 Vrms)	Fast Transients (EFT) 5/50 ( $T_r/T_h$ ) ns, 5kHz $\pm 2$ kV Performance Criterion A	Performance Criterion A	Pass
7.3	EN 61000-4-5:2006	Auxiliary a.c. power input ports (rated voltage $\leq$ 400 Vrms)	Surges 1.2/50 (8/20) ( $T_r/T_h$ ) $\mu$ s Line to ground: $\pm 2$ kV 42 $\Omega$ , 0.5 $\mu$ F Line to line: $\pm 1$ kV 42 $\Omega$ , 0.5 $\mu$ F Performance Criterion B	Performance Criterion A	Pass
8.1	EN 61000-4-6:2014	Signal & communication, process measurement & control ports	Radio-frequency common mode (CS) 80% AM (1kHz) 0.15-80 MHz, 10V Performance Criterion A	Performance Criterion A	Pass
8.2	EN 61000-4-4:2012	Signal & communication, process measurement & control ports	Fast Transients (EFT) 5/50 ( $T_r/T_h$ ) ns, 5kHz $\pm 2$ kV, Capacitive clamp Performance Criterion A	Performance Criterion A	Pass

EN 50121-3-2:2006 + AC:2008, Immunity requirements  
EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.7 & 12.2.8.1

Table Clause	Basic standard	Port	Test Item / specifications	Result/Remarks	Verdict
9.1	EN 61000-4-3:2006 +A1:2008 +A2:2010	Enclosure ports	Radio-frequency electromagnetic field amplitude modulated (RS) <sup>1</sup> , 80% AM (1kHz) 80-1000 MHz, 20V/m Performance Criterion A	Performance Criterion A	Pass
9.2	EN 61000-4-3:2006 +A1:2008 +A2:2010	Enclosure ports	Radio-frequency electromagnetic field from digital mobile telephones (RS) <sup>2</sup> , 80% AM (1kHz) 800-1000 MHz, 20V/m 1400-2100 MHz, 10V/m 2100-2500 MHz, 5V/m Performance Criterion A	Performance Criterion A	Pass
9.3	EN 61000-4-2:2009	Enclosure ports	Electrostatic Discharges (ESD) ±6kV Contact discharge ±8kV Air discharge Performance Criterion B	Performance Criterion B	Pass

Note 1: This limit applies to equipment mounted in the passenger compartments, drivers cab or external to the rolling stock (roof, underframe). For equipment mounted in all other areas a severity level of 10 V/m may be used.

Note 2: For large apparatus (e.g. traction drives, auxiliary converters) it is often not practical to perform the immunity test to radiated electromagnetic fields on the complete unit. In such cases the manufacturer should test susceptible sub-systems (e.g. control electronics). The test report should justify the selection or not of sub-systems and any assumptions made (e.g. reduction of field due to case shielding).

Note:

1. There is no deviation to the applied test methods and requirements covered by the scope of this report.
2. The above EN basic standards are applied with latest version if customer has no special requirement.

## 2.1 Performance Criteria

### General Performance Criteria

The general performance criteria apply for those ports for which no specific performance criteria are defined (e.g. auxiliary ports) in the report.

**Performance criterion A:** The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended..

**Performance criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

**Performance criterion C:** Temporary loss of function is allowed, provided the function is selfrecoverable or can be restored by the operation of the controls.

## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty (k=2) ( $\pm$ )	Maximum allowable uncertainty ( $\pm$ )
Conducted disturbance at mains port using AMN, 150kHz ~ 30MHz	2.78 dB	3.4 dB ( $U_{cispr}$ )
Radiated disturbance, 30MHz ~ 1GHz	4.34 dB	6.3 dB ( $U_{cispr}$ )

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

## 2.3 Modification Record

There were no modifications required for compliance.



### 3 General Information

#### 3.1 Features of EUT

The tests reported herein were performed according to the method specified by Vecow Co., Ltd., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

#### 3.2 General Description of EUT

Product	Ultra Compact Embedded System
Brand	Vecow
Test Model	ECS-4000-PoE
Series Model	Vecow ECS-4000 Series, ECS-4000-PoER, ECS-4000-2G, ECS-4000-2R, ECS-4500, ECS-4600, ECS-XXXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)
Model Difference	For marketing purpose
Sample Status	Engineering sample
Operating Software	Window 8, Window 7, Linux
Power Supply Rating	6V to 36V DC in
Accessory Device	Adapter
Data Cable Supplied	N/A

Note:

1. The EUT is an Ultra Compact Embedded System with following interfaces:

- 2 COM\*4 (RS-232/422/485)
- 2 USB 3.0\*2
- 2 USB2.0\*4 (External\*3, Internal\*1)
- 2 Isolated DIO\*16 (DI\*8, DO\*8)
- 2 SIM card sockets\*2
- 2 CFast card socket
- 2 DVI (resolution up to 1920 x 1080, 60Hz)
- 2 Display\*2 (resolution up to 3840 x 2160, 60Hz)
- 2 PoE LAN (10/100Mbps)\*4
- 2 LAN (10/100/1000Mbps)\*2
- 2 Line out
- 2 Mic. in
- 2 DC input

2. The EUT was configured with the following key components:

Component	Brand	Model No. or P/N	Spec.
CPU	Intel	i7-5650U (Broadwell-U)	2.2GHz
Memory	Vecow	M340L-W28M1	4GB SOD PC3-10600 CL9
SSD	Memoright	MRSAJAA128GDB25I00	128GB 2.5"
CFast	Memoright	MCFA J500	32GB

3. The EUT uses following adapter.

Brand	Mean Well
Model	GS160A24
Input Power	100-240Vac, 50/60Hz, 2.0A
Output Power	24Vdc, 6.67A, 160W Max.
Power Line	Non-shielded DC (1.0m) with one ferrite core

### 3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT is designed with AC power of rating 100-240Vac, 50/60Hz.

For radiated emission evaluation, 230Vac/50Hz (for EN 55022, AS/NZS CISPR 22, EN 55011), 120Vac/60Hz (for FCC Part 15) had been covered during the pre-test. The worst data was found at **230Vac/50Hz** and recorded in the applied test report.

Test modes are presented in the report as below.

Mode	Test Condition
Conducted emission test	
1	Full system
Radiated emission test	
1	Full system
Immunity tests	
1	Full system

### 3.4 Test Program Used and Operation Descriptions

#### Emission tests:

- a. Turned on the power of all equipment.
- b. EUT ran a test program to enable all functions.
- c. EUT read and wrote messages from/to HDD/SSD, CFast card and ext. HDDs.
- d. EUT sent and received messages to/from Notebook PCs (kept in a remote area) via two UTP LAN cables.
- e. EUT sent messages to ext. LCD Monitors. Then they displayed messages on their screen simultaneously.
- f. EUT sent messages to printer. Then it printed them out simultaneously.
- g. EUT sent messages to modems.
- h. EUT sent 1kHz audio signal to earphone.
- i. Cameras captured video image to LCD Monitors via EUT.
- j. Steps c-i were repeated.

#### Immunity tests:

- a. Turned on the power of all equipment.
- b. EUT ran a test program to enable all functions.
- c. EUT read and wrote messages from/to HDD/SSD, CFast card, ext. Flash and ext. HDDs.
- d. EUT sent and received messages to/from Notebook PCs (kept in a remote area) via two UTP LAN cables.
- e. EUT sent messages to ext. LCD Monitors. Then they displayed messages on their screen simultaneously.
- f. EUT sent 1kHz audio signal to speaker.
- g. Cameras captured video image to LCD Monitors via EUT.
- h. Steps c-g were repeated.


### 3.5 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 2200 MHz, provided by Vecow Co., Ltd., for detailed internal source, please refer to the manufacturer's specifications.

### 3.6 Miscellaneous

#### Ø Affix CE marking

The marking must be placed visibly and legibly on the product or, if not possible due to the nature of the product, be affixed to the packaging and the accompanying document. The CE marking shall consist of the initials 'CE' taking the following form:

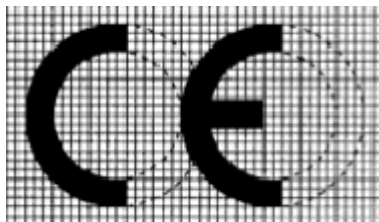

The various components of the CE marking must have the same vertical dimension, and may not be smaller than 5 mm. If the CE marking is reduced or enlarged, the proportions given in the graduated drawing above must be respected.

When the product is subject to other Directives covering other aspects and which also provide for the 'CE' marking, the accompanying documents must indicate that the product also conforms to those other Directives.


However, when one or more of those Directives allow the manufacturer, during a transitional period, to choose which arrangements to apply, the 'CE' marking has to indicate conformity only with the Directives applied by the manufacturer. In this case, the particularities of the Directives applied, as published in the Official Journal of the European Union, must be given in the documents, notices or instructions required by the Directives and accompanying such products.

## 4 Configuration and Connections with EUT

### 4.1 Connection Diagram of EUT and Peripheral Devices


Emission tests:

#### TEST CONFIGURATION

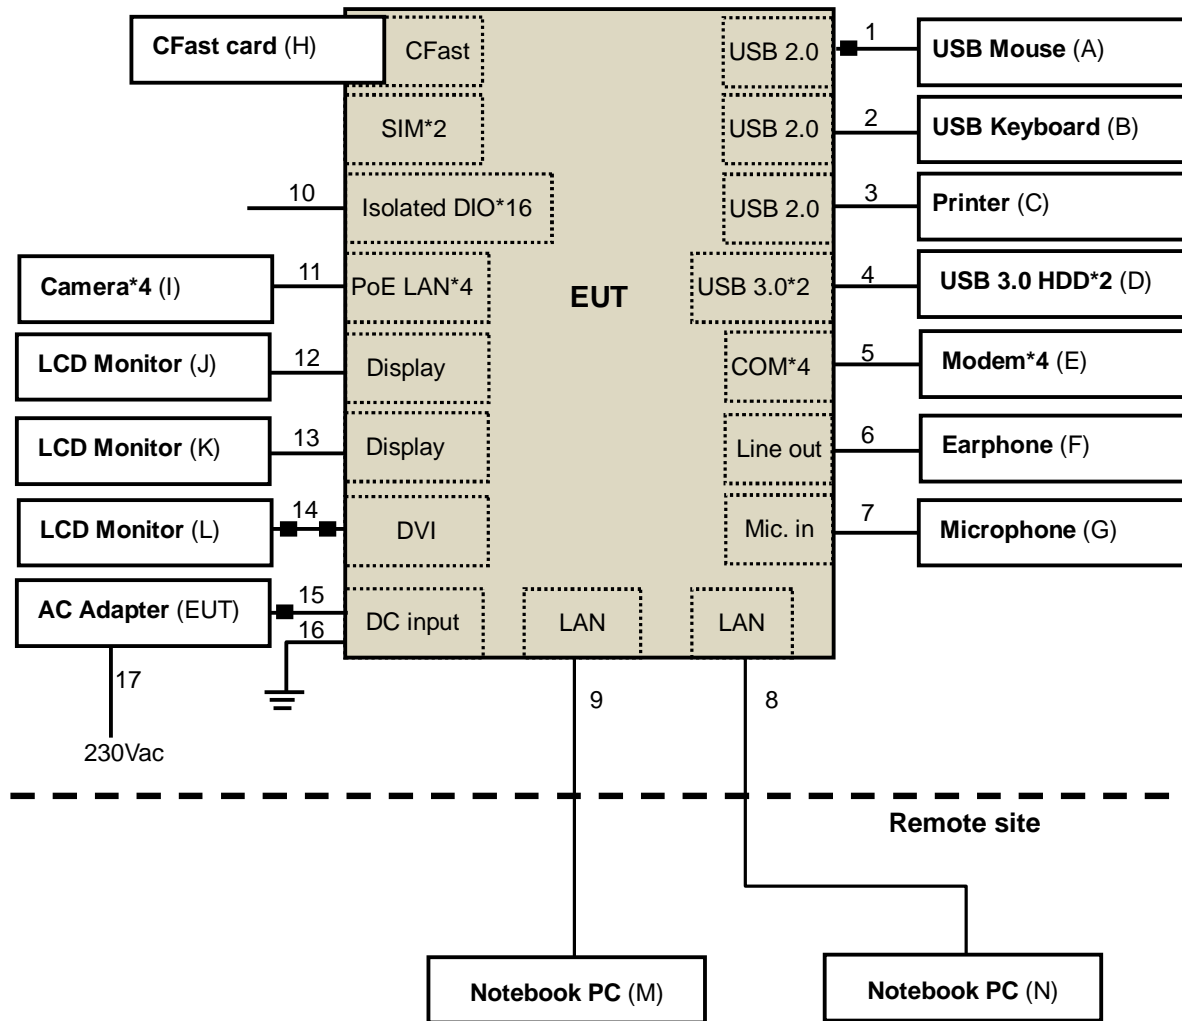

Immunity tests:

**TEST CONFIGURATION**

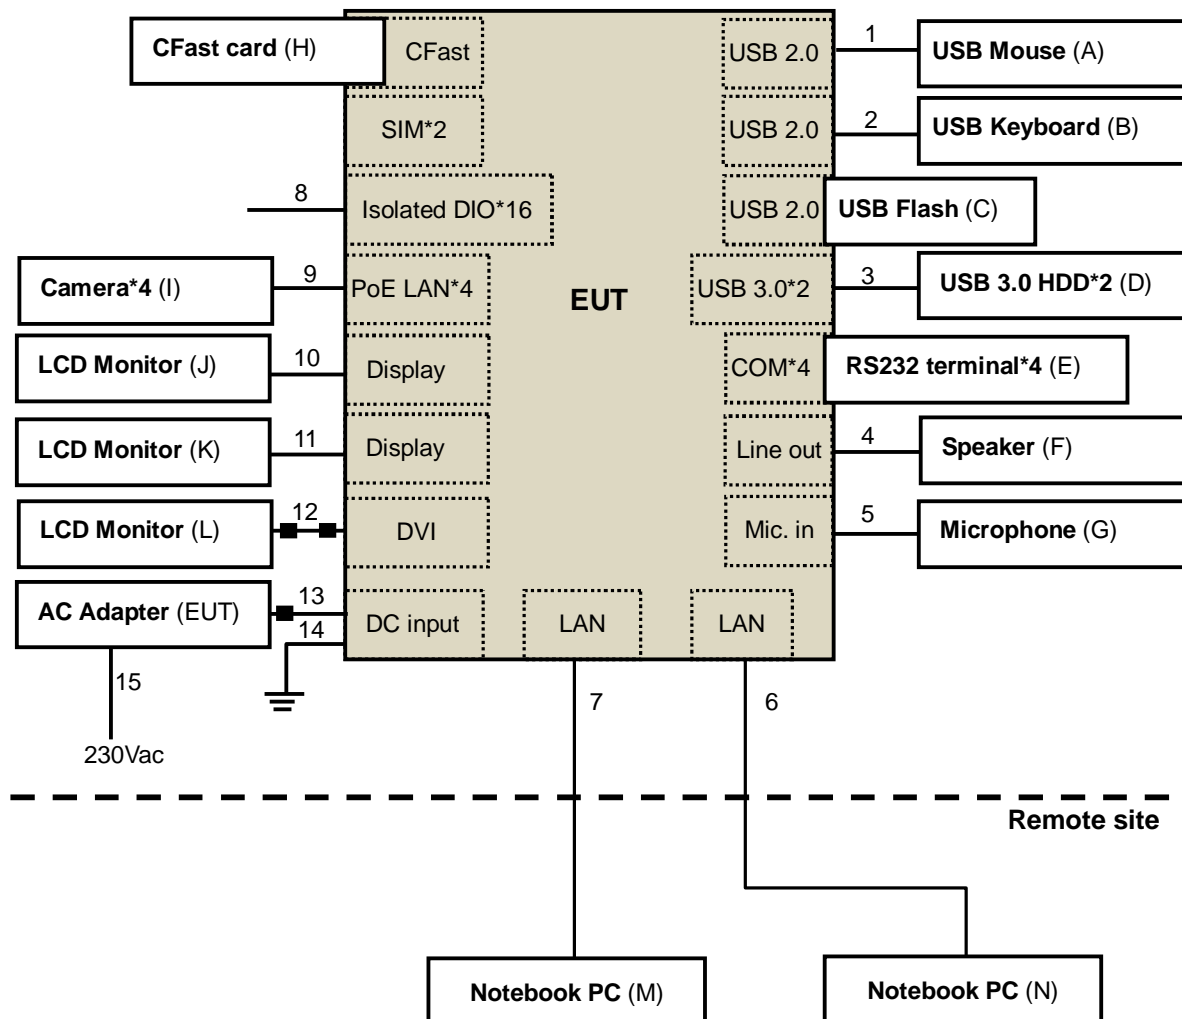

## 4.2 Configuration of Peripheral Devices and Cable Connections

### Emission tests:

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB Mouse	Microsoft	1113	9170515896631	FCC DoC Approved	Provided by Lab
B.	USB KEYBOARD	BTC	5200U	G09302046630	FCC DoC Approved	Provided by Lab
C.	PRINTER	LEXMARK	Z33	N/A	FCC DoC Approved	Provided by Lab
D.	USB 3.0 Hard Disk*2	WD	WDBUZG0010BB K-PESN	WXN1E84F21W	FCC DoC Approved	Provided by Lab
		WD	WDBUZG0010BB K-PESN	WXN1E94A9S8X	FCC DoC Approved	Provided by Lab
E.	MODEM*4	ACEEX	1414	980020534	IFAXDM1414	Provided by Lab
		ACEEX	1414	980020532	IFAXDM1414	Provided by Lab
		ACEEX	1414	980020538	IFAXDM1414	Provided by Lab
		ACEEX	1414	0206026752	IFAXDM1414	Provided by Lab
F.	EARPHONE	PHILIPS	SBC HL145	N/A	N/A	Provided by Lab
G.	MICROPHONE	Labtec	mic-333	N/A	N/A	Provided by Lab
H.	CFast card	Memoright	MCFA J500	T032C21C390008	N/A	Supplied by client
I.	Camera*4	3M	A301MIF-3N	T31504053/54/55/56	N/A	Supplied by client
J.	LCD Monitor	ViewSonic	HTEMCP68FLVW DN	2828713E09080009	FCC DoC Approved	Provided by Lab
K.	LCD Monitor	ASUS	HTDMCP28JVUS DN	2651804E03070001	FCC DoC Approved	Provided by Lab
L.	LCD Monitor	DELL	U2410	CN082WXD728720CC 10NL	FCC DoC Approved	Provided by Lab
M.	Notebook PC	SONY	SVS151A12P	275548477001024	FCC DoC Approved	Provided by Lab
N.	Notebook PC	DELL	PP27L	8SNZ12S	FCC DoC Approved	Provided by Lab

### Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items M-N acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.85	Y	1	Provided by Lab
2.	USB cable	1	1.55	Y	0	Provided by Lab
3.	USB cable	1	1.8	Y	0	Provided by Lab
4.	USB cable	2	0.5	Y	0	Provided by Lab
5.	RS232 cable	4	1.0	Y	0	Provided by Lab
6.	Audio cable	1	1.2	N	0	Provided by Lab
7.	Audio cable	1	2.4	N	0	Provided by Lab
8.	LAN cable	1	10.0	N	0	Provided by Lab
9.	LAN cable	1	10.0	N	0	Provided by Lab
10.	Data cable	16	0.65	N	0	Supplied by client
11.	LAN cable	4	3.0	Y	0	Provided by Lab
12.	Display cable	1	1.8	Y	0	Provided by Lab
13.	Display cable	1	1.8	Y	0	Provided by Lab
14.	DVI cable	1	1.8	Y	2	Provided by Lab
15.	DC power cable	1	1.0	N	1	Supplied by client
16.	Ground cable	1	1.4	N	0	Provided by Lab
17.	AC power cord	1	1.8	N	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

**Immunity tests:**

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB MOUSE	HP	M-UAE96	F93A90H5BWG04YT	FCC DoC Approved	Provided by Lab
B.	USB KEYBOARD	Silicon Graphis	SK-2502U	M990207294	GYUR58SK	Provided by Lab
C.	USB Flash	PNY	CURVE	N/A	N/A	Provided by Lab
D.	USB 3.0 Hard Disk*2	BUFFALO	HD-HX1	45564801201903	FCC DoC Approved	Provided by Lab
		BUFFALO	HD-HXU3	15564800201033	FCC DoC Approved	Provided by Lab
E.	RS232 terminal*4	N/A	N/A	N/A	N/A	Provided by Lab
F.	SPEAKER	KINYO	KSP-25	N/A	N/A	Provided by Lab
G.	MICROPHONE	Yinwei	YW-001	N/A	N/A	Provided by Lab
H.	CFast card	Memoright	MCFA J500	T032C21C390008	N/A	Supplied by client
I.	Camera*4	3M	A301MIF-3N	T31504053/54/55/56	N/A	Supplied by client
J.	LCD Monitor	DELL	2408WFP	CN0NN79274261823S 1DMS	FCC DoC Approved	Provided by Lab
K.	LCD Monitor	DELL	U2413f	CN-06VNX5-72872-46 D-A89L	FCC DoC Approved	Provided by Lab
L.	LCD Monitor	DELL	U2413f	CN-06VNX5-72872-46 D-A88L	FCC DoC Approved	Provided by Lab
M.	Notebook PC	DELL	PP04X	6C1VY1S	FCC DoC Approved	Provided by Lab
N.	Notebook PC	DELL	PP04X	9LRVR1S	FCC DoC Approved	Provided by Lab

**Note:**

1. All power cords of the above support units are non-shielded (1.8m).
2. Items M-N acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.5	Y	0	Provided by Lab
2.	USB cable	1	2.5	Y	0	Provided by Lab
3.	USB cable	2	0.5	Y	0	Provided by Lab
4.	Audio cable	1	1.0	N	0	Provided by Lab
5.	Audio cable	1	1.0	N	0	Provided by Lab
6.	LAN cable	1	10.0	N	0	Provided by Lab
	LAN cable (For CS test only)	1	10.0	Y	0	Provided by Lab
7.	LAN cable	1	10.0	N	0	Provided by Lab
	LAN cable (For CS test only)	1	10.0	Y	0	Provided by Lab
8.	Data cable	16	0.65	N	0	Supplied by client
9.	LAN cable	4	6.5	Y	0	Provided by Lab
10.	Display cable	1	1.8	Y	0	Provided by Lab
11.	Display cable	1	1.8	Y	0	Provided by Lab
12.	DVI cable	1	1.8	Y	2	Provided by Lab
13.	DC power cable	1	1.0	N	1	Supplied by client
14.	Ground cable	1	1.4	N	0	Provided by Lab
15.	AC power cord	1	1.8	N	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).



## 5 Conducted Disturbance at Auxiliary a.c. or d.c. Power Ports

### 5.1 Limits

Frequency (MHz)	Quasi-peak, (dBuV)
0.009 - 0.15	no limits
0.15 - 0.5	99
0.5 - 30	93

Notes: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100276	Apr. 01, 2015	Mar. 31, 2016
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ENV216	101197	Apr. 27, 2015	Apr. 26, 2016
LISN With Adapter (for EUT)	AD10	C10Ada-002	Apr. 27, 2015	Apr. 26, 2016
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 25, 2014	Nov. 24, 2015
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 06, 2015	May 05, 2016
Software	Cond_V7.3.7	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C10.01	Feb. 17, 2015	Feb. 16, 2016
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-011484	May 19, 2015	May 18, 2016
ROHDE & SCHWARZ Artificial Mains Network (For TV EUT)	ESH3-Z5	100220	Nov. 20, 2014	Nov. 19, 2015
LISN With Adapter (for TV EUT)	100220	N/A	Nov. 20, 2014	Nov. 19, 2015

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in Shielded Room No. 10.  
3. The VCCI Site Registration No. C-1852.  
4. Tested Date: Oct. 14, 2015.

### 5.3 Test Arrangement

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

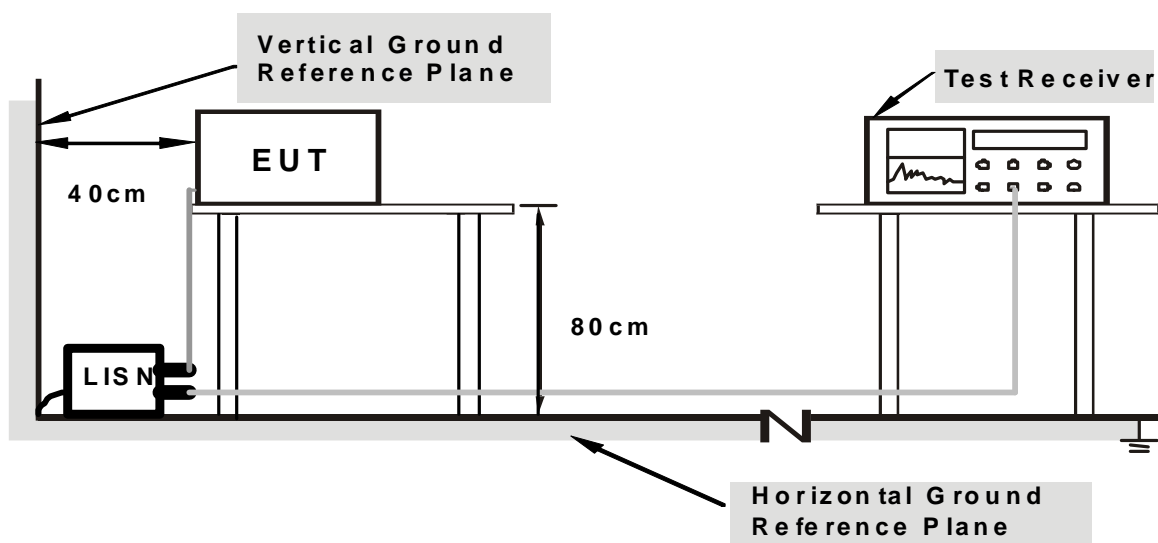

**Note: Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.


### 5.4 Test Results

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 9kHz
<b>Input Power</b>	230Vac, 50Hz	<b>Environmental Conditions</b>	23°C, 74%RH
<b>Tested by</b>	Chin-Wen Wang		
<b>Test Mode</b>	Mode 1		

Phase Of Power : Line (L)						
No	Freq. [MHz]	Corr.	Reading Value	Emission Level	Limit	Margin
		Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)
		(dB)	Q.P.	Q.P.	Q.P.	Q.P.
1	0.17734	9.67	43.75	53.42	99.00	-45.58
2	0.22812	9.67	44.52	54.19	99.00	-44.81
3	0.34922	9.67	39.69	49.36	99.00	-49.64
4	0.68516	9.68	30.31	39.99	93.00	-53.01
5	0.91563	9.70	28.94	38.64	93.00	-54.36
6	16.22656	9.90	32.21	42.11	93.00	-50.89

#### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission Level – Limit value
3. Correction Factor = Insertion loss + Cable loss
4. Emission Level = Correction Factor + Reading Value

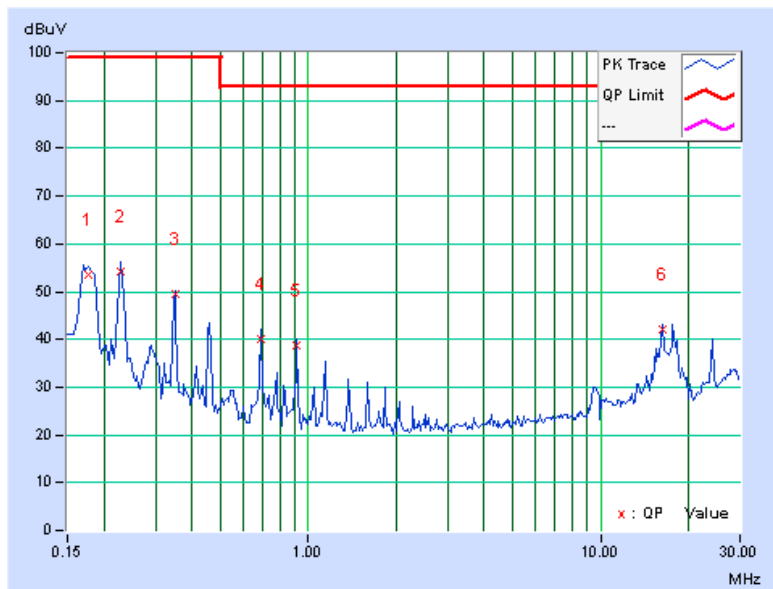


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 9kHz
<b>Input Power</b>	230Vac, 50Hz	<b>Environmental Conditions</b>	23°C, 74%RH
<b>Tested by</b>	Chin-Wen Wang		
<b>Test Mode</b>	Mode 1		

Phase Of Power : Neutral (N)						
No	Freq. [MHz]	Corr.	Reading Value	Emission Level	Limit	Margin
		Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)
		(dB)	Q.P.	Q.P.	Q.P.	Q.P.
1	0.17472	9.70	43.41	53.11	99.00	-45.89
<b>2</b>	<b>0.22812</b>	<b>9.71</b>	<b>44.56</b>	<b>54.27</b>	<b>99.00</b>	<b>-44.73</b>
3	0.34922	9.71	39.37	49.08	99.00	-49.92
4	0.68516	9.72	30.35	40.07	93.00	-52.93
5	0.91563	9.73	29.42	39.15	93.00	-53.85
6	16.16797	9.97	30.43	40.40	93.00	-52.60

**REMARKS:**

1. The emission levels of other frequencies were very low against the limit.
2. Margin value = Emission Level – Limit value
3. Correction Factor = Insertion loss + Cable loss
4. Emission Level = Correction Factor + Reading Value

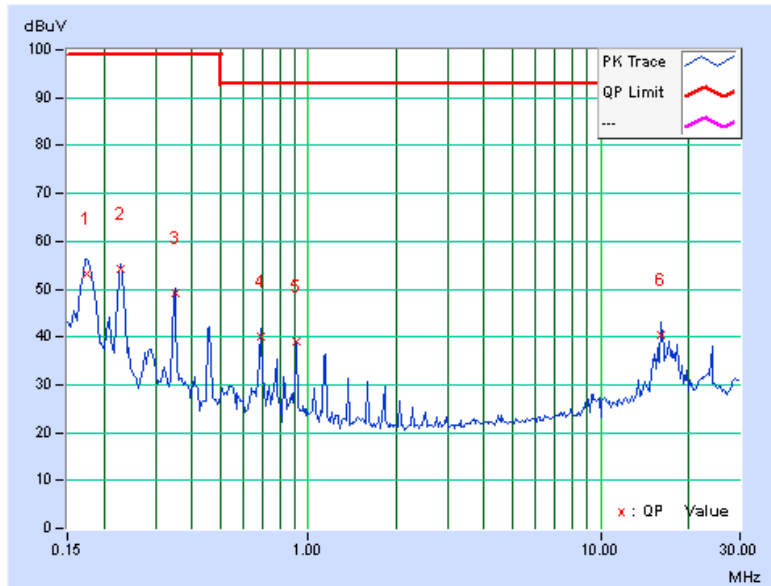

## 6 Radiated Disturbance up to 1 GHz

### 6.1 Limits

Frequency (MHz)	dBuV/m (at 10m) / quasi-peak
30 - 230	40
230 - 1000	47

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 6.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCI	100412	Aug. 24, 2015	Aug. 23, 2016
Schwarzbeck BILOG Antenna	VULB9168	9168-479	Feb. 02, 2015	Feb. 01, 2016
CT Turn Table	TT100	CT-0055	NA	NA
CT Tower	AT100	CT-0055	NA	NA
Software	Radiated_V7.6.15.9.4	NA	NA	NA
ADT RF Switches BOX	EM-H-01-1	1002	Jun. 17 2015	Jun. 16, 2016
WOKEN RF cable	8D	CABLE-ST6-01	Jun. 17 2015	Jun. 16, 2016

- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Open Site No. 6.
  3. The VCCI Site Registration No. R-728.
  4. The FCC Site Registration No. 90427.
  5. Tested Date: Oct. 15, 2015.

### 6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

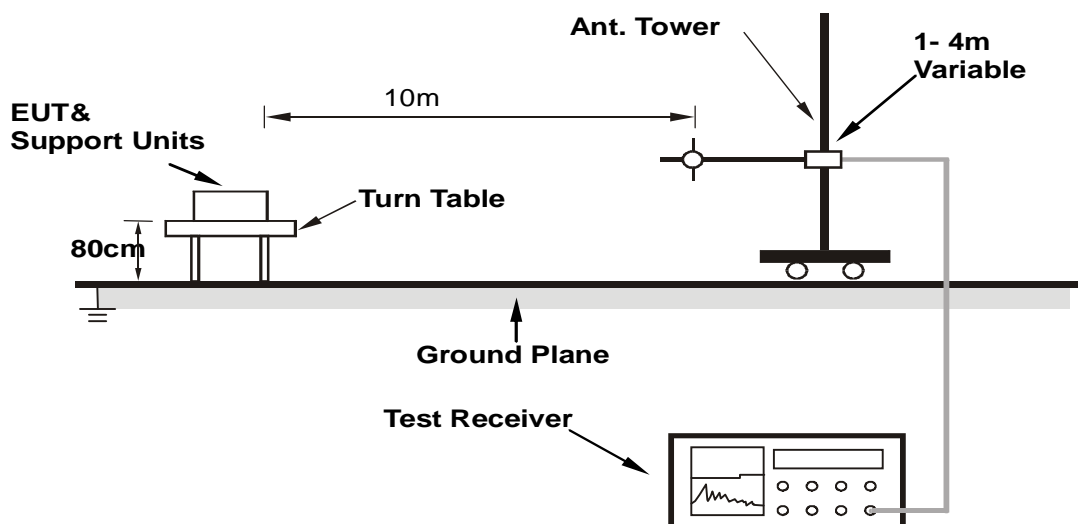

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 6.4 Test Results


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Tested by</b>	Vhenson Huang	<b>Environmental Conditions</b>	25°C, 63%RH
<b>Test Mode</b>	Mode 1		

**Antenna Polarity & Test Distance : Horizontal at 10 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.82	24.53 QP	40.00	-15.47	4.00 H	200	9.93	14.60
2	125.01	29.46 QP	40.00	-10.54	4.00 H	185	16.14	13.32
3	213.84	29.14 QP	40.00	-10.86	4.00 H	264	16.75	12.39
4	250.03	33.46 QP	47.00	-13.54	2.91 H	120	18.82	14.64
5	308.57	37.15 QP	47.00	-9.85	2.52 H	206	19.93	17.22
6	468.77	40.95 QP	47.00	-6.05	1.92 H	170	19.30	21.65
7	617.18	40.61 QP	47.00	-6.39	1.96 H	84	15.45	25.16
8	702.88	38.25 QP	47.00	-8.75	1.00 H	161	12.24	26.01
9	745.12	38.90 QP	47.00	-8.10	1.17 H	131	11.61	27.29
10	890.62	40.02 QP	47.00	-6.98	1.00 H	198	10.82	29.20
<b>11</b>	<b>999.99</b>	<b>43.79 QP</b>	<b>47.00</b>	<b>-3.21</b>	<b>1.00 H</b>	<b>104</b>	<b>13.12</b>	<b>30.67</b>

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

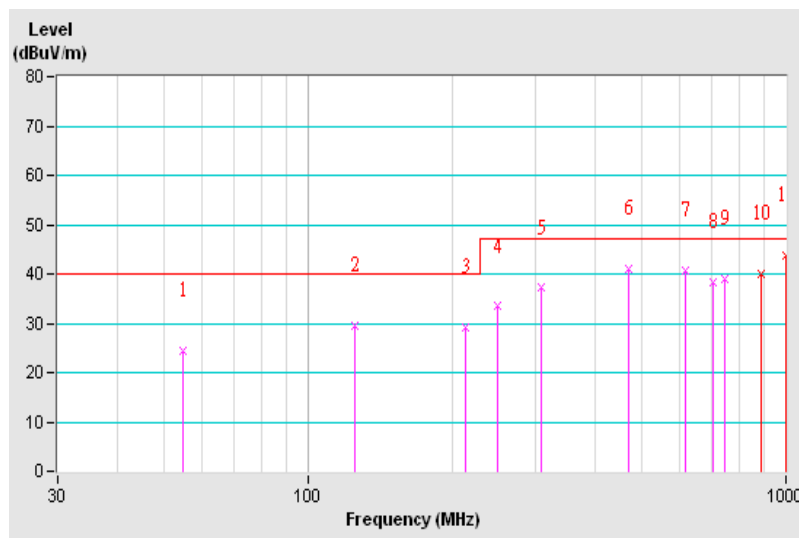


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Tested by</b>	Vhenson Huang	<b>Environmental Conditions</b>	25°C, 63%RH
<b>Test Mode</b>	Mode 1		

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.16	33.64 QP	40.00	-6.36	1.44 V	101	19.53	14.11
2	68.72	33.80 QP	40.00	-6.20	2.02 V	329	20.63	13.17
3	85.83	30.18 QP	40.00	-9.82	1.83 V	211	20.75	9.43
4	125.00	32.68 QP	40.00	-7.32	1.00 V	211	19.36	13.32
5	154.28	30.91 QP	40.00	-9.09	1.00 V	291	15.43	15.48
6	216.12	30.98 QP	40.00	-9.02	1.00 V	44	18.45	12.53
7	261.05	37.90 QP	47.00	-9.10	1.00 V	19	22.79	15.11
8	468.75	42.89 QP	47.00	-4.11	1.00 V	187	21.24	21.65
9	617.18	38.68 QP	47.00	-8.32	2.60 V	66	13.52	25.16
10	750.01	37.58 QP	47.00	-9.42	2.30 V	67	10.22	27.36
11	890.62	39.70 QP	47.00	-7.30	2.51 V	259	10.50	29.20
12	999.99	41.89 QP	47.00	-5.11	2.01 V	252	11.22	30.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

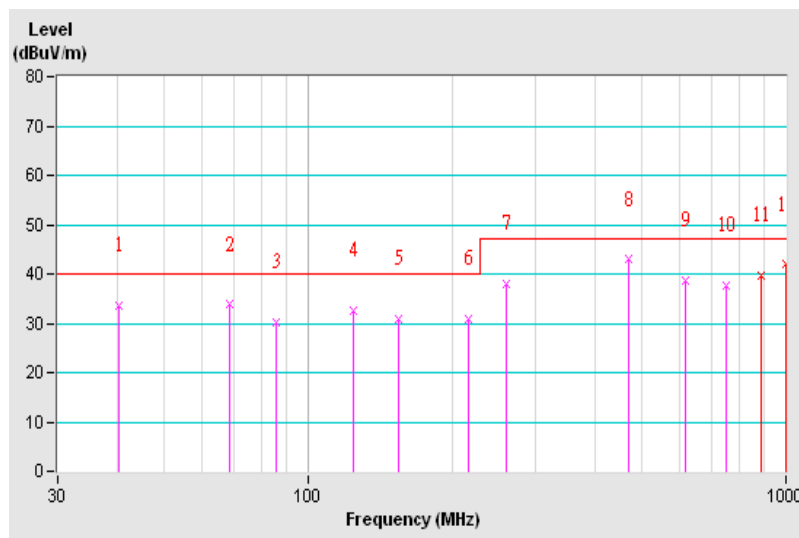



## 7 Electrostatic Discharge Immunity Test (ESD)

### 7.1 Test Specification

<b>Basic Standard:</b>	EN 61000-4-2
<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Discharge Voltage:</b>	Air Discharge: $\pm 2$ , $\pm 4$ , $\pm 8$ kV (Direct) Contact Discharge: $\pm 2$ , $\pm 4$ kV, $\pm 6$ kV (Direct/Indirect)
<b>Number of Discharge:</b>	Minimum 20 times at each test point
<b>Discharge Mode:</b>	Single Discharge
<b>Discharge Period:</b>	1-second minimum


### 7.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
KeyTek, ESD Simulator	MZ-15/EC	0504259	Oct. 26, 2015	Oct. 25, 2016

- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in ESD Room No. 1.
  3. Tested Date: Nov. 19, 2015.

### 7.3 Test Arrangement

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

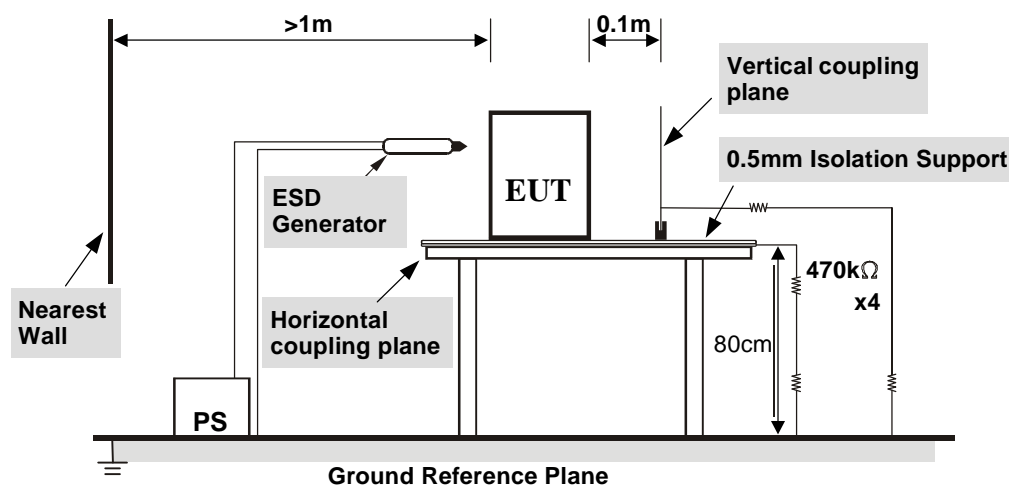

#### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 7.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Aga Lin
Environmental Conditions	24 °C, 53% RH 1011 mbar	Test mode	Mode 1

### Test Results of Direct Application

Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criterion
2	+/-	1-3	Note 1	NA	A
4, 6	+/-	1-3	Note 2, 3	NA	B
2, 4	+/-	7, 9, 10	NA	Note 1	A
8	+/-	7, 9, 10	NA	Note 2, 3	B
2, 4, 8	+/-	4-6, 8, 11	NA	Note 1	A

Description of test points of direct application: Please refer to following page for representative mark only.

### Test Results of Indirect Application



Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criterion
2	+/-	Four Sides	Note 1	Note 1	A
4, 6	+/-	Four Sides	Note 2	Note 2	B

Description of test points of indirect application:



1. Front side                      2. Rear side                      3. Right side                      4. Left side

- Note: 1. The EUT function was correct during the test.  
 2. There was minor flicker and lines flicker disturbance on screen during the test, but self-recoverable after the test.  
 3. The video messages disappeared on screen during the test, but self-recoverable after the test.

### Description of Test Points

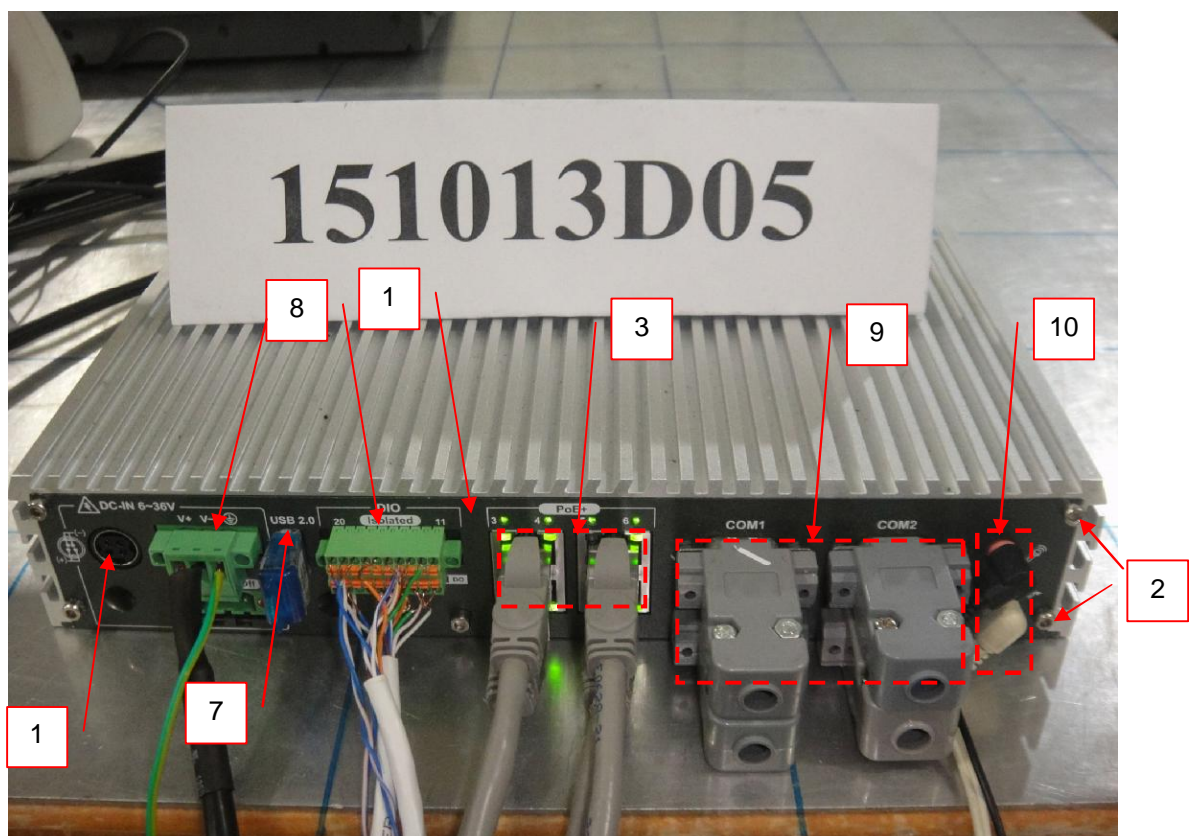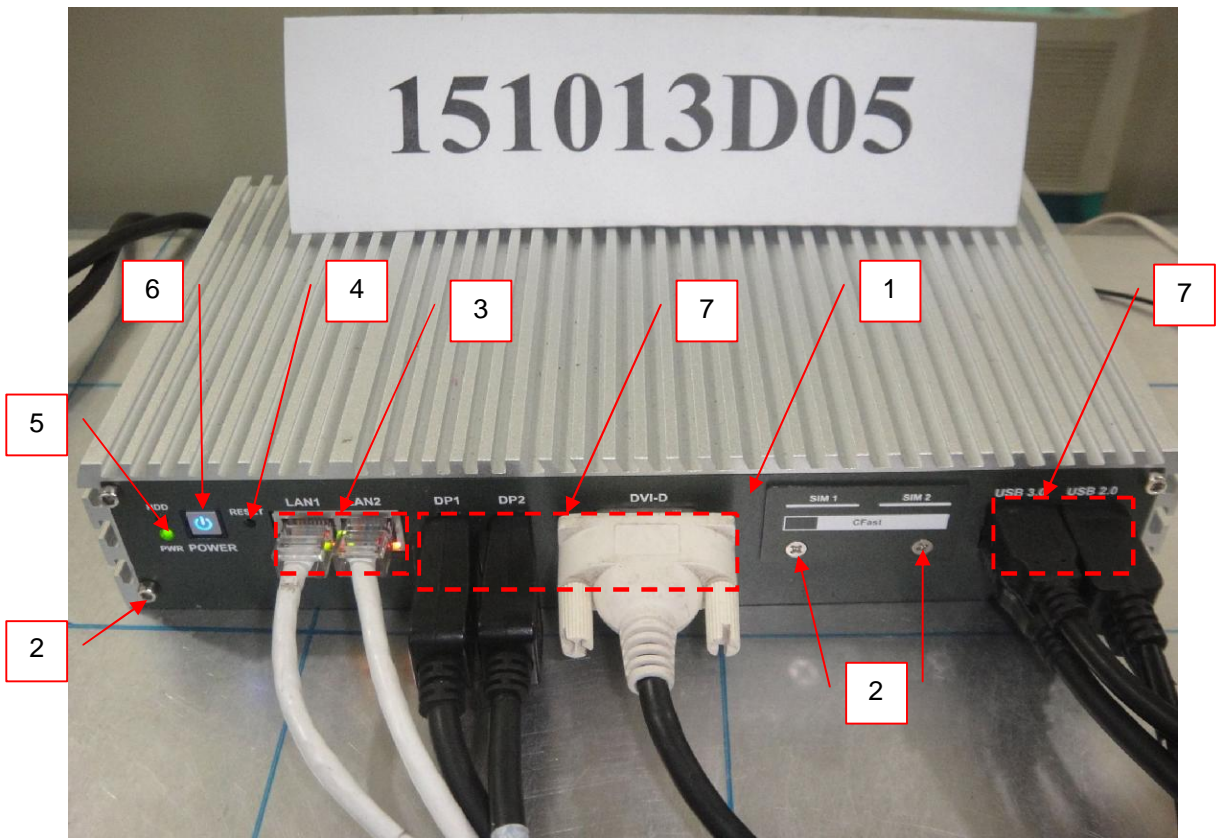



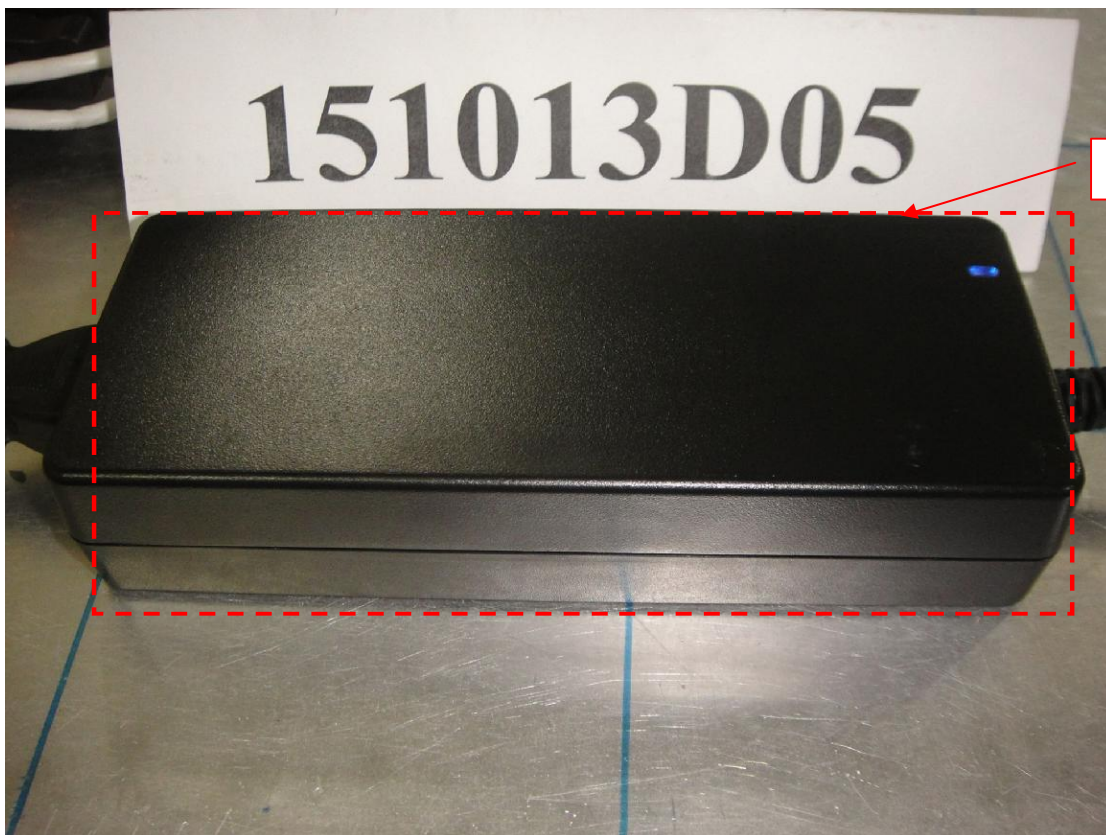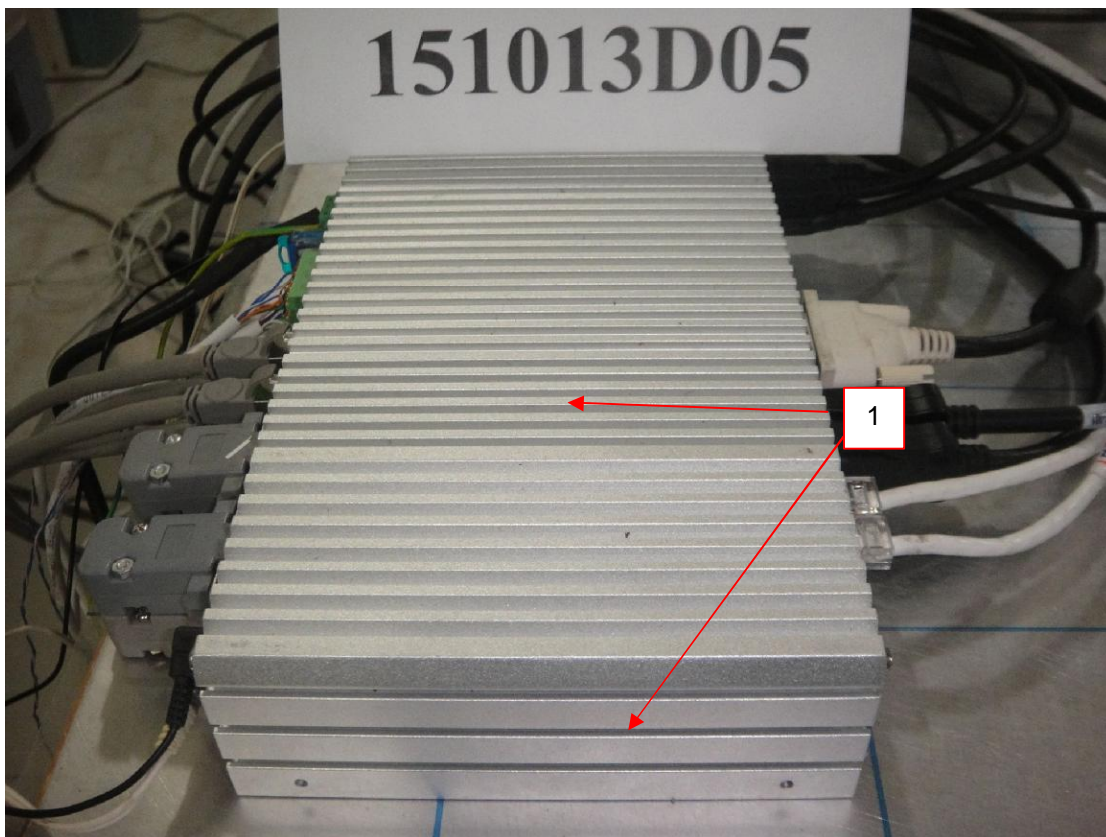

## 8 Radio-frequency Electromagnetic Field Immunity Test (RS)

### 8.1 Test Specification

Basic Standard:	EN 61000-4-3
Frequency Range, Field Strength:	80-1000 MHz, 20V/m <sup>1</sup> 800-1000 MHz, 20V/m 1400-2100 MHz, 10V/m 2100-2500 MHz, 5V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Antenna Height:	1.5m
Dwell Time:	3 seconds

Note 1: This limit applies to equipment mounted in the passenger compartments, drivers cab or external to the rolling stock (roof, underframe). For equipment mounted in all other areas a severity level of 10 V/m may be used.

### 8.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Agilent Signal Generator	E8257D	MY48050465	Jul. 21, 2015	Jul. 20, 2016
PRANA RF Amplifier	AP32DP280	0811-894	NA	NA
TESEQ RF Amplifier	CBA1G-150	T44220	NA	NA
AR RF Amplifier	35S4G8AM4	0326094	NA	NA
AR RF Amplifier	100S1G4M3	0329249	NA	NA
AR Controller	SC1000M3	305910	NA	NA
BOONTON RF Voltage Meter	4232A	10180	Jun. 01, 2015	May 31, 2016
BOONTON Power Sensor	51011-EMC	34152	Jun. 01, 2015	May 31, 2016
BOONTON Power Sensor	51011-EMC	34153	Jun. 01, 2015	May 31, 2016
AR Log-Periodic Antenna	AT6080	0329465	NA	NA
EMCO BiconiLog Antenna	3141	1001	NA	NA
AR High Gain Antenna	AT4002A	306533	NA	NA
AR High Gain Horn Antenna	AT4010	0329800	NA	NA
CHANCE MOST Full Anechoic Chamber (9x5x3m)	Chance Most	RS-002	Feb. 05, 2015	Feb. 04, 2016
Software	RS_V7.6	NA	NA	NA

- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in RS Room No.2.
  3. Tested Date: Oct. 27, 2015.

### 8.3 Test Arrangement

The test procedure was in accordance with EN 61000-4-3.

- a. The testing was performed in a modified semi-anechoic chamber.
- b. The frequency ranges and field strength levels are 80-1000 MHz, 20V/m & 800-1000 MHz, 20V/m & 1400-2100 MHz, 10V/m and 2100-2500 MHz, 5V/m with the signal 80% amplitude modulated with a 1kHz sine wave.
- c. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

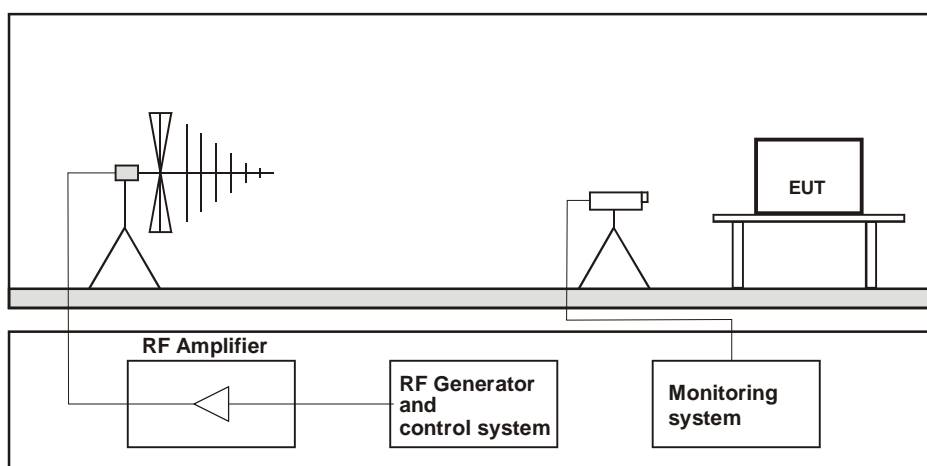

#### Table-top Equipment

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 8.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Aga Lin
Environmental Conditions	26 °C, 68% RH	Test mode	Mode 1

Frequency (MHz)	Polarity	Azimuth(°)	Applied Field Strength		Test Distance (m)	Observation	Performance Criterion
			(V/m)	Modulation			
80 - 1000	V&H	0, 90, 180, 270	20	80% AM (1kHz)	1.5	Note	A
800 - 1000	V&H	0, 90, 180, 270	20	80% AM (1kHz)	1.5	Note	A
1400 - 2100	V&H	0, 90, 180, 270	10	80% AM (1kHz)	3	Note	A
2100 - 2500	V&H	0, 90, 180, 270	5	80% AM (1kHz)	3	Note	A

Note: The EUT function was correct during the test.



## 9 Electrical Fast Transient/Burst Immunity Test (EFT)

### 9.1 Test Specification

Basic Standard:	EN 61000-4-4
Test Voltage:	Signal & communication, process measurement & control ports: $\pm 2\text{kV}$ , Capacitive clamp Auxiliary a.c. power input ports (rated voltage $\leq 400\text{ Vrms}$ ): $\pm 2\text{kV}$
Impulse Repetition Frequency:	5kHz
Impulse Wave Shape:	5/50 ( $T_r/T_h$ ) ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	1 min.


### 9.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Haefely, EFT Generator	PEFT 4010	154954	Apr. 17, 2015	Apr. 16, 2016
Haefely, Capacitive Clamp	IP4A	155173	Apr. 17, 2015	Apr. 16, 2016

- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in EFT Room.
  3. Tested Date: Dec. 21, 2015.

### 9.3 Test Arrangement

- Both positive and negative polarity discharges were applied.
- The distance between any coupling devices and the EUT should be 0.5 m for table-top equipment testing, and 1.0 m for floor standing equipment.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with EN 61000-4-4, 5/50 ns.

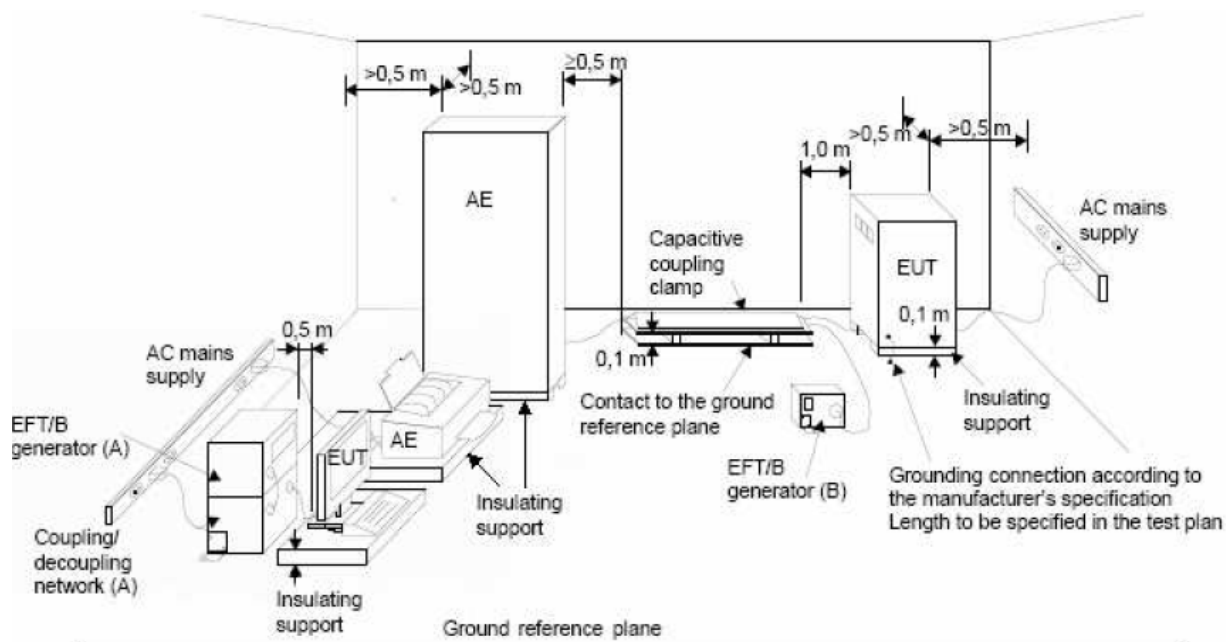

**NOTE:**

- (A) location for supply line coupling
- (B) location for signal lines coupling

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 9.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Chiming Li
Environmental Conditions	23 °C, 73% RH	Test mode	Mode 1

Auxiliary a.c. power input ports (rated voltage  $\leq$  400 Vrms)

Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criterion
2	L1	+/-	Note	A
2	L2	+/-	Note	A
2	PE	+/-	Note	A
2	L1-L2-PE	+/-	Note	A

Signal & communication, process measurement & control ports

Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criterion
2	UTP LAN	+/-	Note	A
2	STP LAN	+/-	Note	A

Note: The EUT function was correct during the test.

## 10 Surge Immunity Test

### 10.1 Test Specification

Basic Standard:	EN 61000-4-5
Wave-Shape:	Auxiliary a.c. power input ports (rated voltage $\leq 400$ Vrms): 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current
Test Voltage:	Line to line: $\pm 0.5$ kV, $\pm 1$ kV, Line to ground: $\pm 0.5$ kV, $\pm 1$ kV, $\pm 2$ kV output impedance of 42 $\Omega$ (40 $\Omega$ and 2 $\Omega$ generator) and a coupling capacitance of 0,5 $\mu$ F
AC Phase Angle (degree):	0°, 90°, 180°, 270°
Pulse Repetition Rate:	1 time / 20 sec.
Number of Tests:	5 positive and 5 negative at selected points

### 10.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
TESEQ, Surge Simulator	NSG 3060	1572	May 20, 2015	May 19, 2016
TESEQ, CDN	CDN 3083-100	1215	May 20, 2015	May 19, 2016
Coupling Decoupling Network	CDN-UTP8	028	Aug. 20, 2015	Aug. 19, 2016

- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in EMS Room No. 2.
  3. Tested Date: Dec. 25, 2015.

### 10.3 Test Arrangement

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

For double-insulated products without PE or external earth connections, the test shall be done in a similar way as for grounded products but without adding any additional external grounded connections. If there are no other possible connections to earth, line-to-ground tests may be omitted.

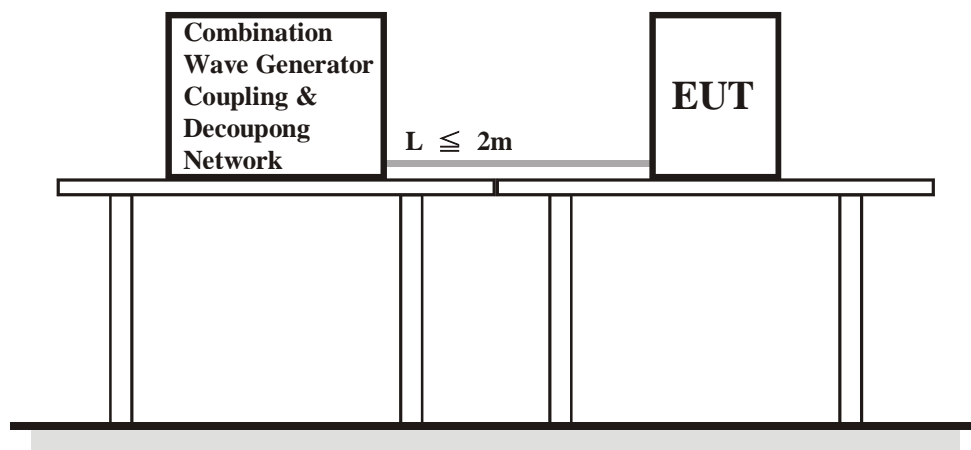

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 10.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Michael Cheng
Environmental Conditions	23 °C, 76% RH	Test mode	Mode 1

Auxiliary a.c. power input ports (rated voltage  $\leq$  400 Vrms)

Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criterion
0.5, 1	L1-L2	+/-	Note	A
0.5, 1, 2	L1-PE	+/-	Note	A
0.5, 1, 2	L2-PE	+/-	Note	A

Note: The EUT function was correct during the test.

## 11 Immunity to Conducted Disturbances Induced by RF Fields (CS)

### 11.1 Test Specification

Basic Standard:	EN 61000-4-6
Frequency Range:	0.15 MHz - 80 MHz
Voltage Level:	Auxiliary a.c. power input ports (rated voltage $\leq$ 400 Vrms), Signal & communication, process measurement & control ports: 10 V
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Dwell Time	3 seconds


### 11.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ Signal Generator	SML03	101801	Jan. 05, 2015	Jan. 04, 2016
Digital Sweep Function Generator	8120	984801	NA	NA
AR Power Amplifier	75A250AM1	306331	NA	NA
FCC Coupling Decoupling Network	FCC-801-M3-25A	48	Jun. 23, 2015	Jun. 22, 2016
FCC Coupling Decoupling Network	FCC-801-M3-25A	01022	Jun. 23, 2015	Jun. 22, 2016
FCC Coupling Decoupling Network	FCC-801-M2-16A	01047	Jun. 23, 2015	Jun. 22, 2016
FISCHER CUSTOM COMMUNICATIONS EM Injection Clamp	F-203I-23mm	455	NA	NA
FISCHER CUSTOM COMMUNICATIONS Current Injection Clamp	F-120-9A	361	NA	NA
EM TEST Coupling Decoupling Network	CDN M1/32A	306508	Jun. 23, 2015	Jun. 22, 2016
TESEQ Coupling Decoupling Network	CDN T800	34428	Jun. 23, 2015	Jun. 22, 2016
FCC Coupling Decoupling Network	FCC-801-T4	02031	Jun. 23, 2015	Jun. 22, 2016
FCC Coupling Decoupling Network	FCC-801-T2	02021	Jun. 23, 2015	Jun. 22, 2016
R&S Power Sensor	NRV-Z5	837878/039	Oct. 26, 2015	Oct. 25, 2016
R&S Power Meter	NRVD	837794/040	Oct. 27, 2015	Oct. 26, 2016
Software	CS_V7.4.2	NA	NA	NA

- Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in CS Room No. 1.  
3. Tested Date: Dec. 23, 2015.

### 11.3 Test Arrangement

- The EUT shall be tested within its intended operating and climatic conditions.
- An artificial hand was placed on the hand-held accessory and connected to the ground reference plane.
- One of the CDNs not used for injection was terminated with 50 ohm, providing only one return path. All other CDNs were coupled as decoupling networks.
- The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. Where the frequency is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

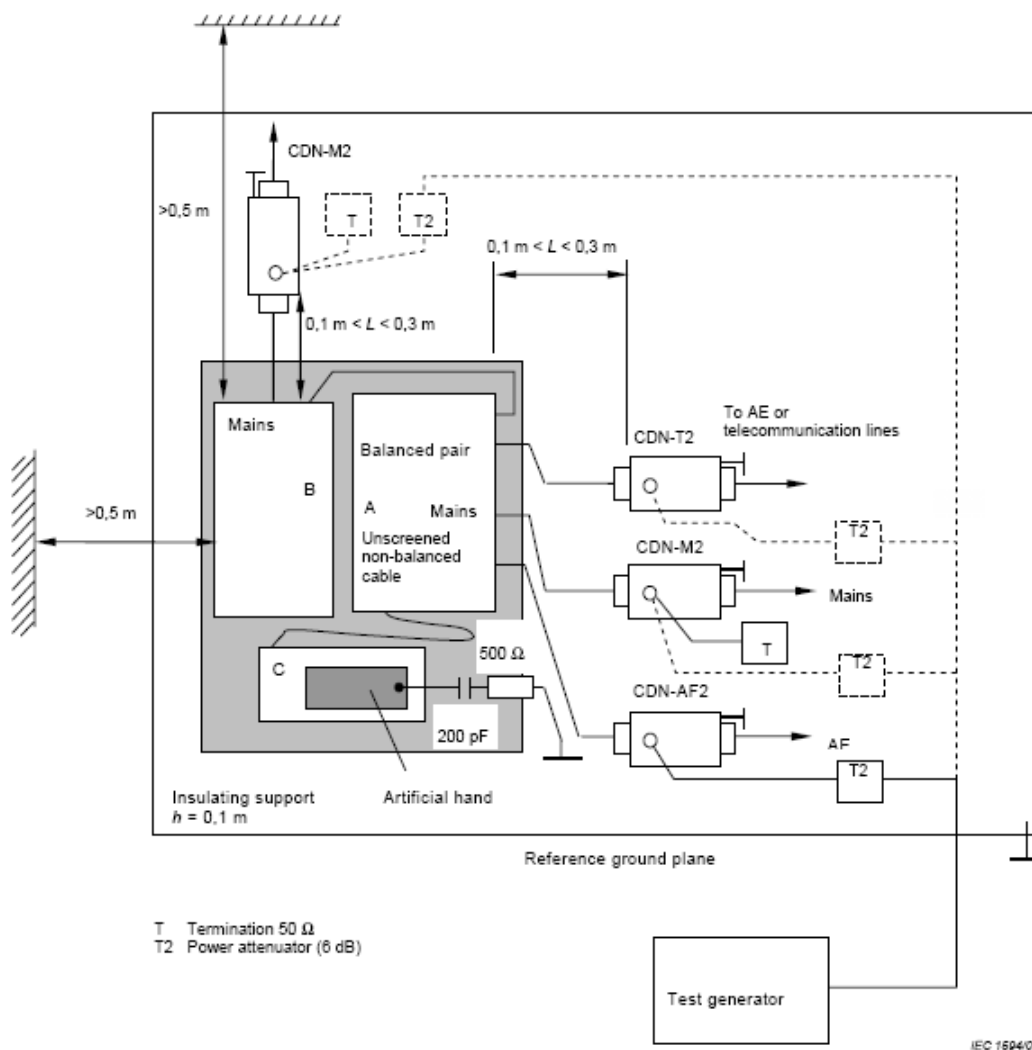

- Note:**
- The EUT clearance from any metallic obstacles shall be at least 0,5 m.
  - Interconnecting cables ( $\leq 1$  m) belonging to the EUT shall remain on the insulating support.
  - The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 11.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Bernie Lu
Environmental Conditions	24 °C, 73% RH	Test mode	Mode 1


Frequency (MHz)	Level (V rms)	Tested Line	Injection Method	Return Path	Observation	Remark	Performance Criterion
0.15 – 80	10	AC Power	CDN-M3	CDN-T8	Note	-	A
0.15 – 80	10	STP LAN (LAN)	EM-Clamp	CDN-M3	Note	-	A
0.15 – 80	10	STP LAN (PoE LAN)	EM-Clamp	CDN-M3	Note	-	A

Note: The EUT function was correct during the test.



## 12 Pictures of Test Arrangements

### 12.1 Conducted Disturbance at Auxiliary a.c. or d.c. power ports

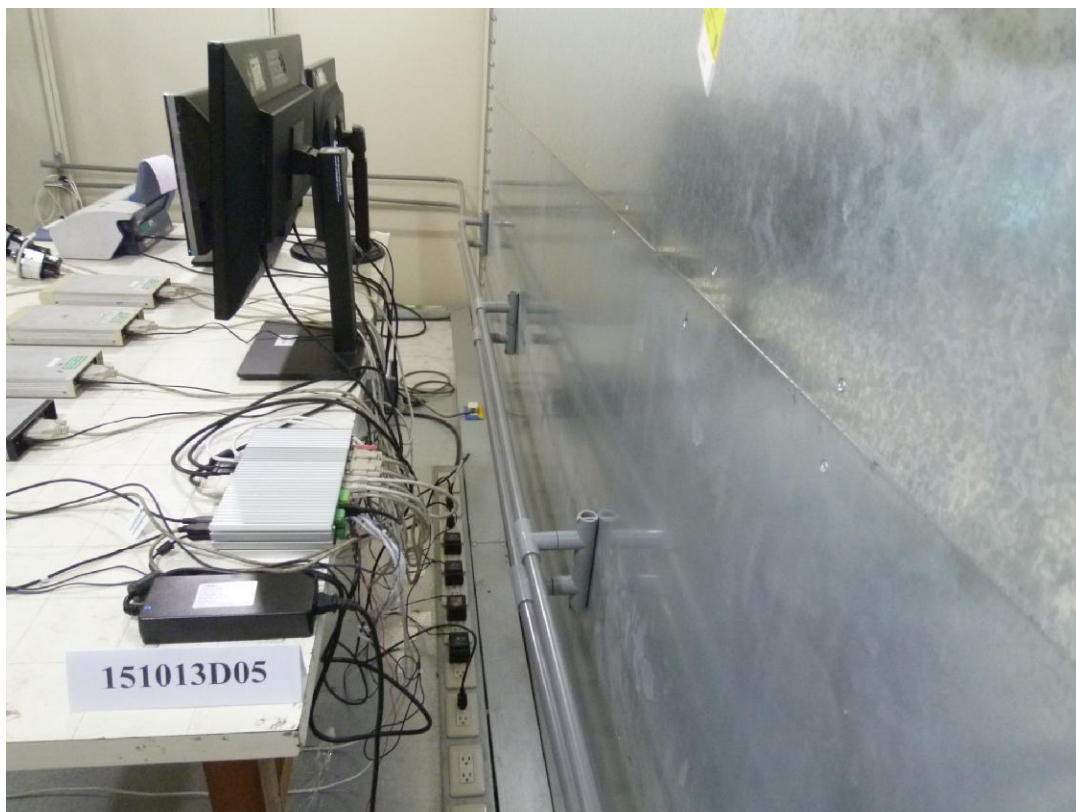

## 12.2 Radiated Disturbance up to 1 GHz






### 12.3 Electrostatic Discharge Immunity Test (ESD)



### 12.4 Radio-frequency Electromagnetic Field Immunity Test (RS)

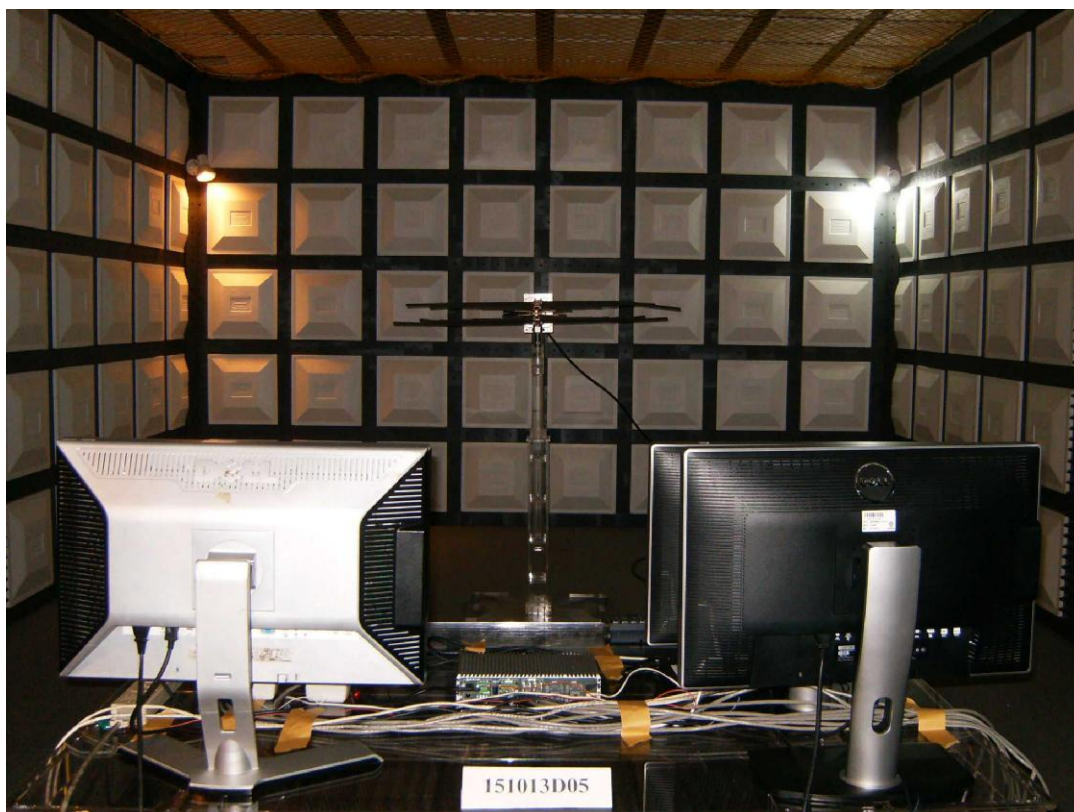



### 12.5 Fast Transients (EFT)

Mains ports



UTP LAN



### STP LAN



## 12.6 Surge





### 12.7 Radio-frequency common mode (CS)

Mains ports



STP LAN (LAN)





### STP LAN (PoE LAN)



## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---