

TEST REPORT

CERTIFICATE OF CONFORMITY

**Standards: 47 CFR FCC Part 15, Subpart B, Class A
ANSI C63.4:2014**

Report No.: FDBDBO-WTW-P21030355

Model No: ECX-2200

Series Model: ECX-2200 Series, ECX-2XXXXXXXXXXXXXXXXXXXXXXXXXXXXX
("X" can be 0-9, A-Z or blank for marketing purpose)

Received Date: Mar. 10, 2021

Test Date: Mar. 15 to 24, 2021

Issued Date: Apr. 19, 2021

Applicant: Vecow Co., Ltd.

Address: 3F., No.10, Jiankang Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

FCC Registration /

Designation Number: 418586 / TW1078

Approved by : Jim Hsiang, **Date:** Apr. 19, 2021
Jim Hsiang / Associate Technical Manager

This test report consists of 25 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vivian Chen / Specialist

Certificate #4327.01

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

Release Control Record	3
1 Certification	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record.....	5
3 General Information	6
3.1 Description of EUT	6
3.2 Primary Clock Frequencies of Internal Source	6
3.3 Features of EUT	6
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode	7
3.5 Test Program Used and Operation Descriptions.....	7
3.6 Connection Diagram of EUT and Peripheral Devices.....	8
3.7 Configuration of Peripheral Devices and Cable Connections	9
4 Test Instruments	10
4.1 Conducted Emissions from input power ports.....	10
4.2 Radiated Emissions up to 1 GHz	10
4.3 Radiated Emissions above 1 GHz	11
5 Test Arrangement	12
5.1 Conducted Emissions from input power ports.....	12
5.2 Radiated Emissions up to 1 GHz	13
5.3 Radiated Emissions above 1 GHz	14
6 Limits of Emission	15
6.1 Conducted Emissions from input power ports.....	15
6.2 Radiated Emissions up to 1 GHz	15
6.3 Radiated Emissions above 1 GHz	15
7 Test Results of Emission	16
7.1 Conducted Emissions from input power ports.....	16
7.1.1 Test Mode 1	16
7.2 Radiated Emissions up to 1 GHz	18
7.2.1 Test Mode 1	18
7.3 Radiated Emissions above 1 GHz	20
7.3.1 Test Mode 1	20
8 Pictures of Test Arrangements	22
8.1 Conducted Emissions from input power ports.....	22
8.2 Radiated Emissions up to 1 GHz	23
8.3 Radiated Emissions above 1 GHz	24
9 Information of the Testing Laboratories	25



Release Control Record

Issue No.	Description	Date Issued
FDBDBO-WTW-P21030355	Original release.	Apr. 19, 2021



1 Certification

Product: Expandable Embedded Box PC

Brand: Vecow

Test Model: ECX-2200

Series Model: ECX-2200 Series, ECX-2XXXXXXXXXXXXXXXXXXXXXXXXXXXXX
("X" can be 0-9, A-Z or blank for marketing purpose)

Sample Status: Engineering sample

Applicant: Vecow Co., Ltd.

Test Date: Mar. 15 to 24, 2021

Standards: 47 CFR FCC Part 15, Subpart B, Class A
ANSI C63.4:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

2 Summary of Test Results

FCC Part 15 Clause	Test Item	Result/Remarks	Verdict
15.107	Conducted Emissions from input power ports	Minimum passing Class A margin is -26.96 dB at 16.21675 MHz	Pass
15.109	Radiated Emissions up to 1 GHz	Minimum passing Class A margin is -5.53 dB at 216.00 MHz	Pass
	Radiated Emissions above 1 GHz	Minimum passing Class A margin is -13.46 dB at 2309.85 MHz	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions from input power ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.30 dB
Radiated Emissions above 1 GHz	Above 1GHz	4.96 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 Description of EUT

Product	Expandable Embedded Box PC
Brand	Vecow
Test Model	ECX-2200
Series Model	ECX-2200 Series, ECX-2XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)
Model Difference	For marketing purpose
Sample Status	Engineering sample
Operating Software	Windows 10, Burnintest
Power Supply Rating	DC from Adapter
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

The EUT uses following adapter.

Brand	LITEON
Model	PA-1121-24
Input Power	100-240Vac, 2.0A, 50-60Hz
Output Power	24Vdc, 5A, 120W
Power Line	AC 3Pin Non-shielded DC cable (1.5m) with one ferrite core.

3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 2.9GHz, provided by Vecow Co., Ltd., for detailed internal source, please refer to the manufacturer's specifications.

3.3 Features of EUT

1. The tests reported herein were performed according to the method specified by Vecow Co., Ltd., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

Please refer to appendix A of the report if the applicant has provided additional descriptions of the EUT.

2. The EUT was configured with the following key components:

Components	Brand	Model	Specification
CPU	Intel	i7-10700E	2.9GHz
RAM	innodisk	-	DDR4 2666 8GB
SSD	Innodisk	-	2.5" SATA SSD 3ME4 128GB

3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

1. The EUT is designed with AC power of rating 100-240Vac, 50-60Hz. For radiated emission evaluation, 230Vac/50Hz (for EN 50155), 120Vac/60Hz (for FCC Part 15) had been covered during the pre-test. The worst data was found at **120Vac/60Hz** and recorded in the applied test report.

2. EUT has been pre-tested under following test modes, and test **mode 1** was the worst case for final test.

Mode	Test Condition
1	Display* 2: 3840*2160, 60Hz + DVI: 1920*1080, 60Hz
2	Display* 2: 3840*2160, 60Hz + D-Sub: 1920*1080, 60Hz


3. Test modes are presented in the report as below.

Mode	Test Condition	Input Power
Conducted emission test		
1	Display* 2: 3840*2160, 60Hz + DVI: 1920*1080, 60Hz	120Vac/ 60Hz
Radiated emission test		
1	Display* 2: 3840*2160, 60Hz + DVI: 1920*1080, 60Hz	120Vac/ 60Hz

3.5 Test Program Used and Operation Descriptions

- a. Turned on the power of all equipment.
- b. EUT ran a test program to enable all functions.
- c. EUT read and wrote messages from/to SSD, Micro SD card and ext. SSDs.
- d. EUT sent and received messages to/from Notebook PCs (kept in a remote area) via two UTP LAN cables (10m each).
- e. EUT sent "H" messages to ext. LCD Monitors. Then they displayed "H" messages on their screens simultaneously.
- f. EUT sent messages to printer and printer printed them out.
- g. EUT sent 1kHz audio signal to earphone.
- h. Set the EUT under full resistor load.
- i. IP cameras captured video image to LCD Monitors via EUT.
- j. Steps c-i were repeated.

3.6 Connection Diagram of EUT and Peripheral Devices

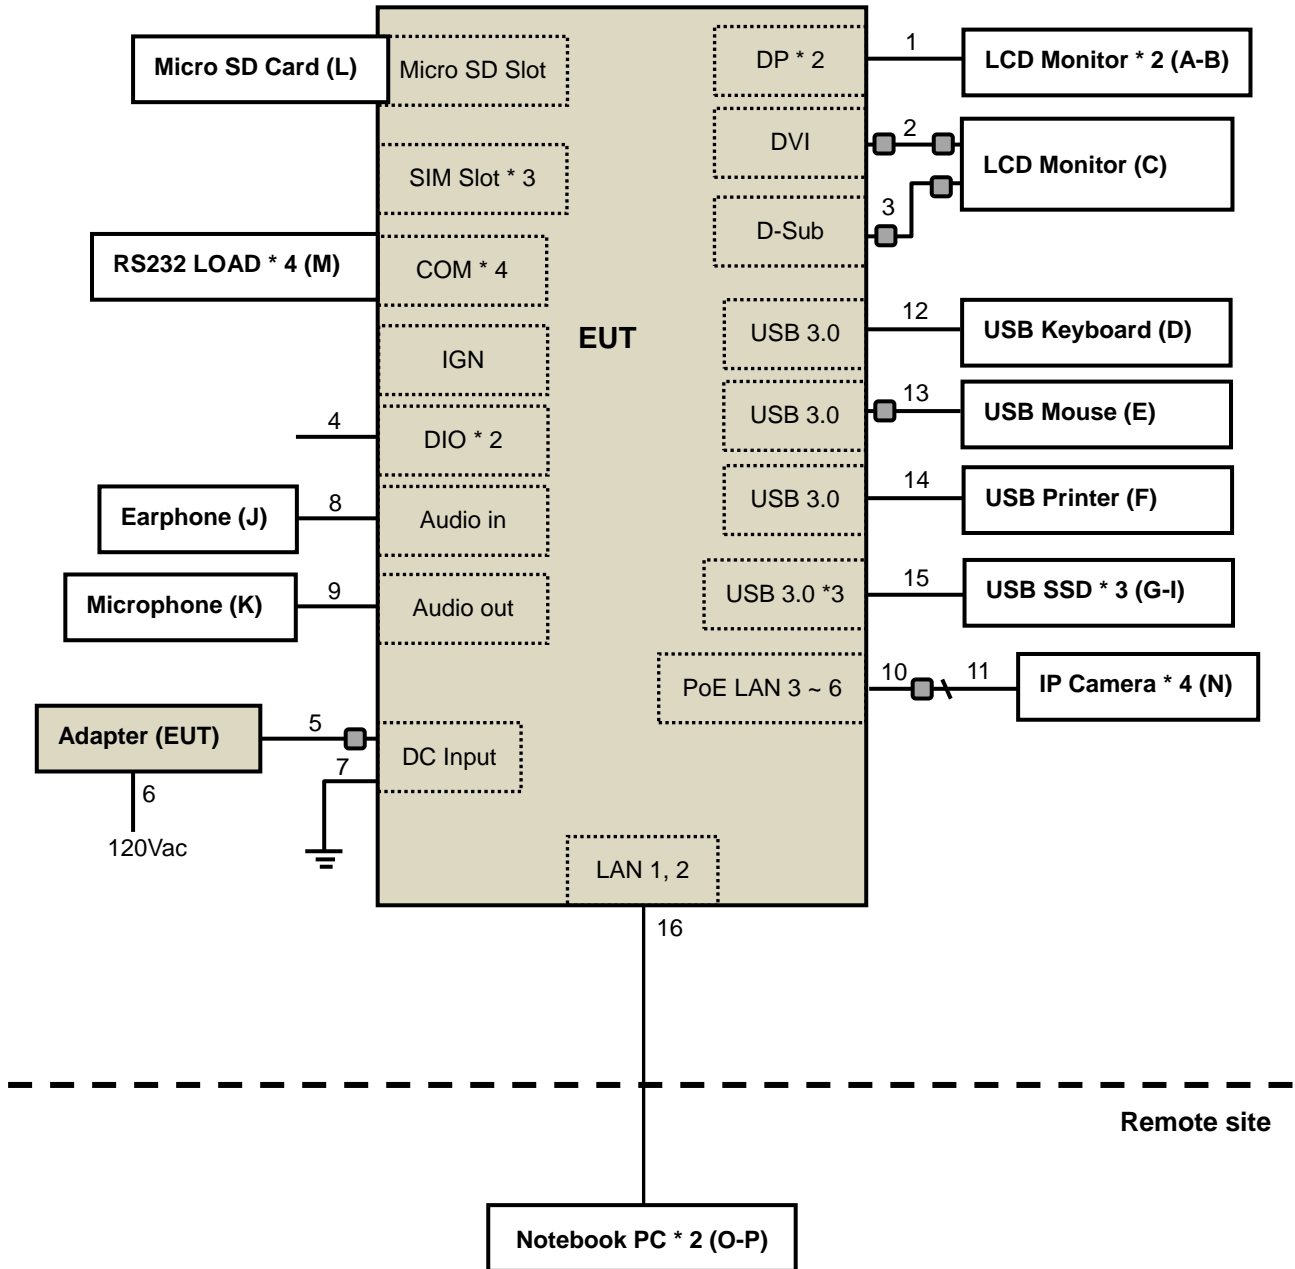



3.7 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	LCD MONITOR	ASUS	VZ249	J3LMRS008938	NA	Provided by Lab
B.	LCD MONITOR	ASUS	MX27U	K1LMRS022990	NA	Provided by Lab
C.	LCD MONITOR	DELL	U2410	CN082WXD728720C C10NL	FCC DoC Approved	Provided by Lab
D.	USB Keyboard	Dell	KB216t	CN-0W33XP-LO300- 7CL-1909	NA	Provided by Lab
E.	USB Mouse	Microsoft	1113	9170528318308	FCC DoC Approved	Provided by Lab
F.	USB Printer	HP	HP Officejet Pro 251dw	CN55FCV012	FCC DoC Approved	Provided by Lab
G.	USB 3.1 SSD	WD	WDBK VX5120PSL	1922MD401387	NA	Supplied by client
H.	USB 3.1 SSD	WD	WDBK VX5120PSL	1922MD401254	NA	Provided by Lab
I.	USB 3.1 SSD	WD	WDBK VX5120PSL	1922MD400948	NA	Provided by Lab
J.	EARPHONE	PHILIPS	SBC HL145	N/A	NA	Provided by Lab
K.	MICROPHONE	Labtec	mic-333	N/A	NA	Provided by Lab
L.	Micro SD Card	SP	N/A	N/A	NA	Provided by Lab
M.	RS232 Load * 4	NA	NA	NA	NA	Supplied by client
N.	IP Camera * 4	NA	MBL030A-ORZ03 10	NA	NA	Supplied by client
O.	Notebook PC	SONY	SVS151A12P	275548477001024	NA	Provided by Lab
P.	Notebook PC	ASUS	PU401L	ECNXBC012528528	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items O-P acted as communication partners to transfer data.

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DP cable	2	1.8	Y	0	Provided by Lab
2.	DVI cable	1	1.8	Y	2	Provided by Lab
3.	D-Sub cable	1	1.8	Y	2	Provided by Lab
4.	Signal cable	2	0.4	N	0	Provided by Lab
5.	DC power cable	1	1.5	N	1	Supplied by client
6.	AC power cable	1	1.8	N	0	Supplied by client
7.	GND cable	1	1.5	N	0	Provided by Lab
8.	Audio cable	1	1.2	N	0	Provided by Lab
9.	Audio cable	1	2.5	N	0	Provided by Lab
10.	LAN cable	4	0.2	N	4	Supplied by client (RJ45, Cat.5e)
11.	LAN cable	4	1.5	N	0	Provided by Lab (RJ45, Cat.5e)
12.	USB cable	1	1.8	Y	0	Provided by Lab
13.	USB cable	1	1.8	Y	1	Provided by Lab
14.	USB cable	1	1.8	Y	0	Provided by Lab
15.	USB cable	3	1.0	Y	0	Provided by Lab
16.	LAN cable	2	10	N	0	Provided by Lab (RJ45, Cat.5e)

Note: The core(s) is(are) originally attached to the cable(s).

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Conducted Emissions from input power ports

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESR3	102413	Feb. 8, 2021	Feb. 7, 2022
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	100104	Dec. 18, 2020	Dec. 17, 2021
LISN With Adapter (for EUT)	AD10	C09Ada-001	Dec. 8, 2020	Dec. 7, 2021
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	847265/023	Nov. 11, 2020	Nov. 10, 2021
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 14, 2020	May 13, 2021
SCHWARZBECK Artificial Mains Network (for EUT)	NNLK 8121	8121-808	Apr. 10, 2020	Apr. 9, 2021
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C09.01	Aug. 14, 2020	Aug. 13, 2021
LYNICS Terminator (For ROHDE & SCHWARZ LISN)	0900510	E1-01-299	Jan. 27, 2021	Jan. 26, 2022

- Note: 1. The test was performed in Shielded Room No. 9. (Conduction 9)
 2. The VCCI Site Registration No. C-11312.
 3. Tested Date: Mar. 15, 2021

4.2 Radiated Emissions up to 1 GHz

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100027	May 19, 2020	May 18, 2021
Schwarzbeck Bilog Antenna	VULB9168	9168-303	Nov. 5, 2020	Nov. 4, 2021
Agilent Preamplifier	8447D	2944A08119	Feb. 18, 2021	Feb. 17, 2022
ADT. Turn Table	TT100	0205	NA	NA
ADT. Tower	AT100	0205	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
ADT RF Switches BOX	EMH-011	1001	Oct. 23, 2020	Oct. 22, 2021
Pacific RF cable With 5dB PAD	8D	CABLE-ST2-01	Oct. 23, 2020	Oct. 22, 2021

- Note: 1. The test was performed in Open Site No. 2.
 2. The VCCI Site Registration No. R-10237.
 3. Tested Date: Mar. 19, 2021

4.3 Radiated Emissions above 1 GHz

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Agilent Spectrum	E4446A	MY51100009	Jun. 23, 2020	Jun. 22, 2021
Agilent Test Receiver	N9038A	MY50010135	May 29, 2020	May 28, 2021
EMCI Preamplifier	EMC0126545	980076	Feb. 19, 2021	Feb. 18, 2022
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 19, 2021	Feb. 18, 2022
EMCI Preamplifier	EMC184045B	980235	Feb. 19, 2021	Feb. 18, 2022
ETS Preamplifier	3117-PA	00215857	Nov. 23, 2020	Nov. 22, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 22, 2020	Nov. 21, 2021
EMCO Horn Antenna	3115	9312-4192	Nov. 22, 2020	Nov. 21, 2021
Max Full. Turn Table & Tower	MF7802	MF780208103	NA	NA
Software	Radiated_V8.7.08	NA	NA	NA
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH7-3.6m	Jul. 9, 2020	Jul. 8, 2021
MICRO-TRONICS Notch filter	BRC50703-01	010	May 29, 2020	May 28, 2021
MICRO-TRONICS Band Pass Filter	BRM17690	005	May 29, 2020	May 28, 2021


Note: 1. The test was performed in Chamber No. 7.
2. The VCCI Site Registration No. G-10039
3. Tested Date: Mar. 24, 2021

5 Test Arrangement

5.1 Conducted Emissions from input power ports

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

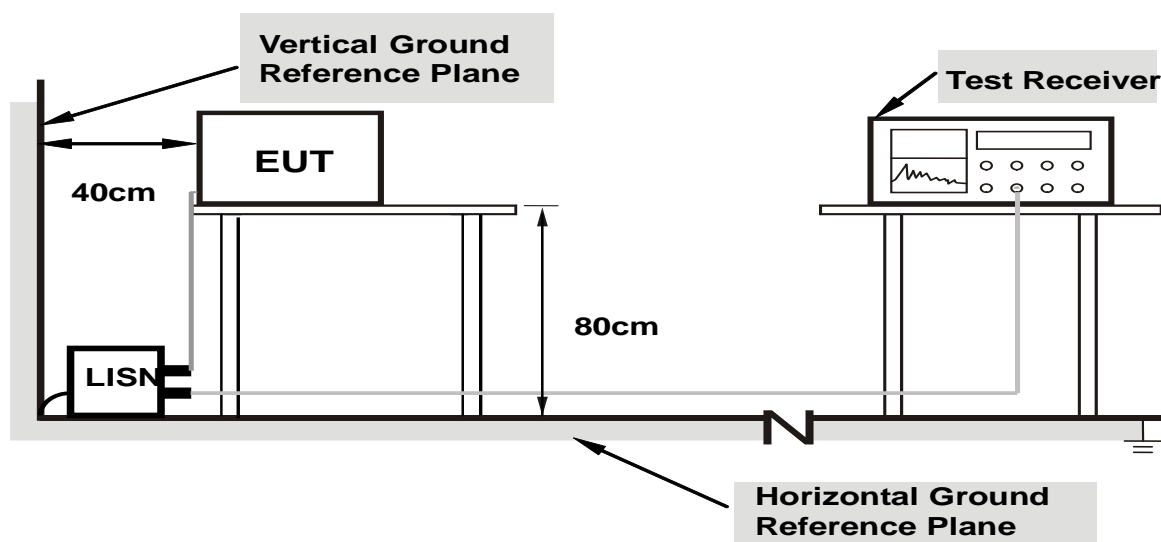


Note: Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2 Radiated Emissions up to 1 GHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

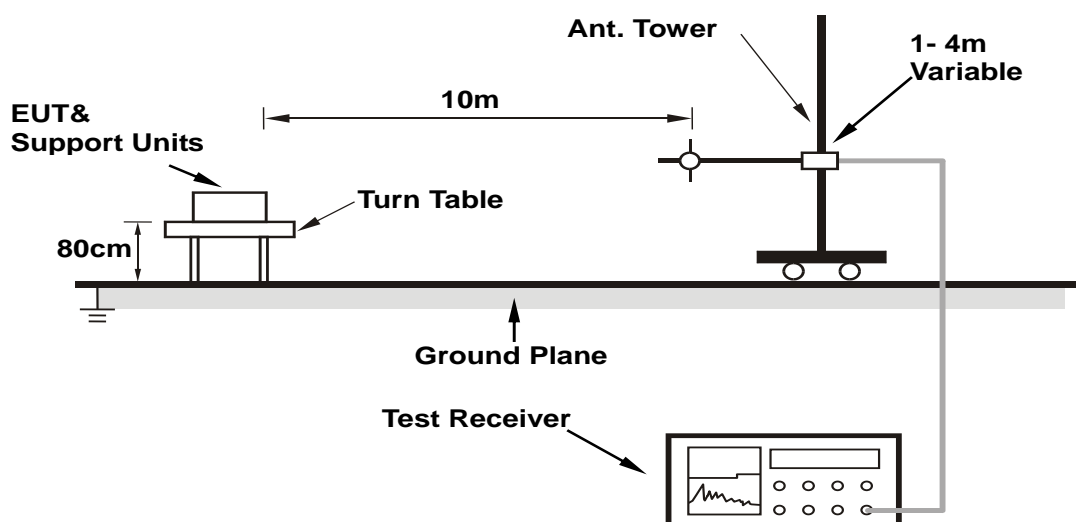


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

5.3 Radiated Emissions above 1 GHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

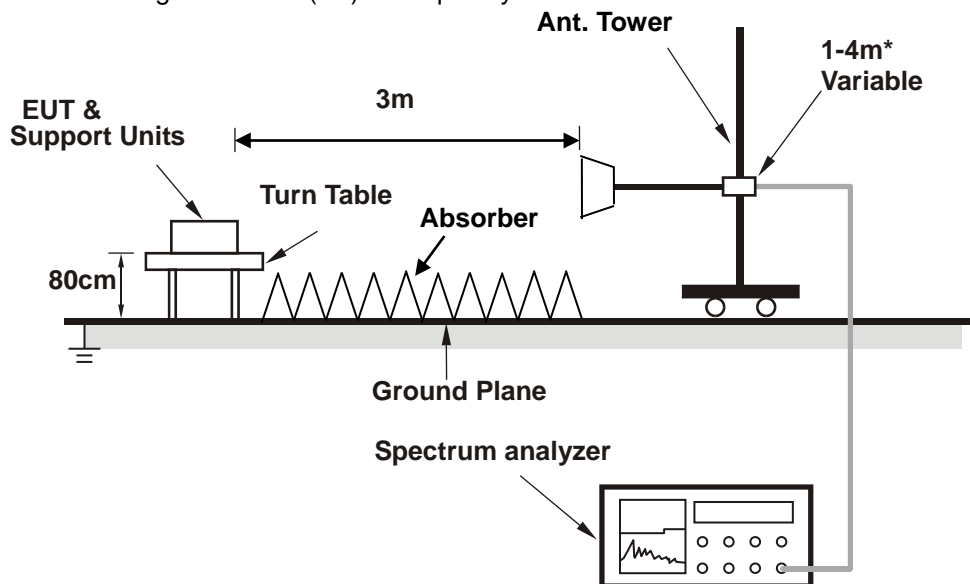

* :depends on the EUT height and the antenna 3dB beamwidth both.

The test arrangement is in accordance with ANSI C63.4:2014. For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6 Limits of Emission

6.1 Conducted Emissions from input power ports

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

6.2 Radiated Emissions up to 1 GHz

Radiated Emissions Limits at 10 meters (dB μ V/m)				
Frequencies (MHz)	FCC Part 15B, Class A	FCC Part 15B, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6	47	37
230-960				
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dB μ V/m)				
Frequencies (MHz)	FCC Part 15B, Class A	FCC Part 15B, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46	57.5	47.5
230-960				
960-1000	60	54		

Notes: 1. The lower limit shall apply at the transition frequencies.

6.3 Radiated Emissions above 1 GHz

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

Radiated Emissions Limits at 3 meters (dB μ V/m)		
Frequency range	Class A	Class B
Above 1GHz	Avg: 60 Peak: 80	Avg: 54 Peak: 74

Notes: 1. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.

7 Test Results of Emission

7.1 Conducted Emissions from input power ports


7.1.1 Test Mode 1

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	21°C, 65%RH
Tested by	Vhenson Huang	Test Date	2021/3/15
Test Mode	Mode 1		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.20	23.44	5.25	33.64	15.45	79.00	66.00	-45.36	-50.55
2	0.42334	10.22	27.60	15.49	37.82	25.71	79.00	66.00	-41.18	-40.29
3	0.89469	10.27	21.12	5.83	31.39	16.10	73.00	60.00	-41.61	-43.90
4	1.15705	10.29	22.45	7.85	32.74	18.14	73.00	60.00	-40.26	-41.86
5	6.96332	10.60	29.22	21.00	39.82	31.60	73.00	60.00	-33.18	-28.40
6	16.21675	11.00	31.66	22.04	42.66	33.04	73.00	60.00	-30.34	-26.96

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

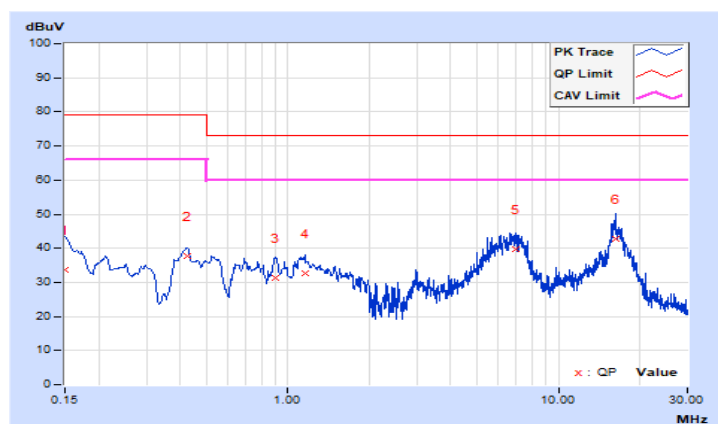


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	21°C, 65%RH
Tested by	Vhenson Huang	Test Date	2021/3/15
Test Mode	Mode 1		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17347	10.21	25.86	6.62	36.07	16.83	79.00	66.00	-42.93	-49.17
2	0.64080	10.26	20.25	6.37	30.51	16.63	73.00	60.00	-42.49	-43.37
3	0.94809	10.28	20.88	6.53	31.16	16.81	73.00	60.00	-41.84	-43.19
4	5.62967	10.54	27.50	19.27	38.04	29.81	73.00	60.00	-34.96	-30.19
5	7.06110	10.60	31.12	20.52	41.72	31.12	73.00	60.00	-31.28	-28.88
6	16.14244	10.86	25.42	16.88	36.28	27.74	73.00	60.00	-36.72	-32.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

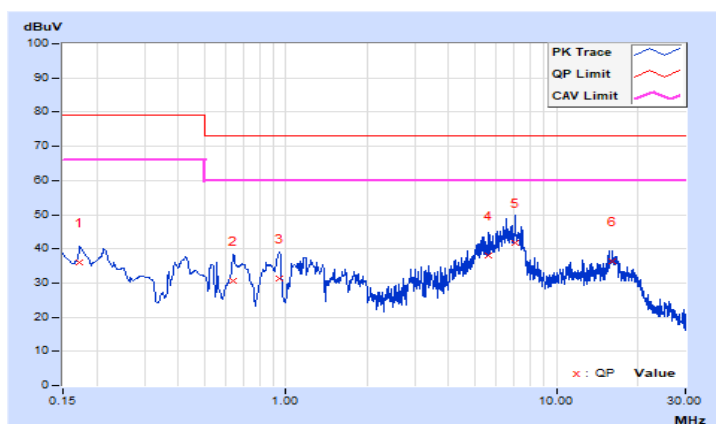

7.2 Radiated Emissions up to 1 GHz


7.2.1 Test Mode 1

Frequency Range	30MHz ~ 1GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120kHz
Tested By	Paul Chen	Environmental Conditions	21.0°C, 73.0%RH
Test Mode	Mode 1	Test Date	2021/3/19

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.37	28.44 QP	40.00	-11.56	4.00 H	342	44.11	-15.67
2	124.99	28.08 QP	40.00	-11.92	4.00 H	288	39.27	-11.19
3	138.37	30.71 QP	40.00	-9.29	4.00 H	266	40.52	-9.81
4	189.04	33.80 QP	40.00	-6.20	4.00 H	334	45.68	-11.88
5	216.00	34.47 QP	40.00	-5.53	4.00 H	142	46.43	-11.96
6	297.12	33.56 QP	47.00	-13.44	3.83 H	214	41.45	-7.89
7	324.15	38.57 QP	47.00	-8.43	3.14 H	234	45.55	-6.98
8	461.98	35.97 QP	47.00	-11.03	2.22 H	106	40.13	-4.16
9	500.00	39.45 QP	47.00	-7.55	1.93 H	97	42.93	-3.48
10	550.14	38.30 QP	47.00	-8.70	1.87 H	262	40.88	-2.58
11	600.01	35.84 QP	47.00	-11.16	1.45 H	97	36.96	-1.12
12	924.01	40.45 QP	47.00	-6.55	1.00 H	104	34.73	5.72
13	960.00	34.92 QP	47.00	-12.08	1.00 H	133	28.65	6.27

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

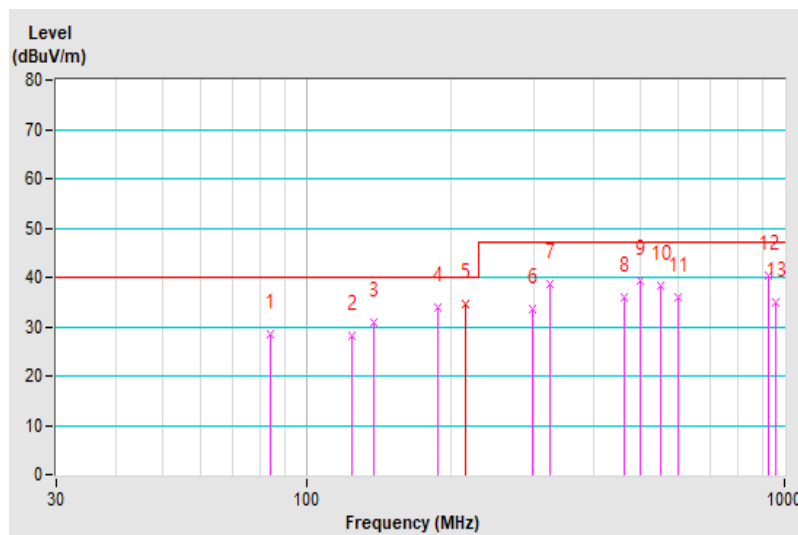




Frequency Range	30MHz ~ 1GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120kHz
Tested By	Paul Chen	Environmental Conditions	21.0°C, 73.0%RH
Test Mode	Mode 1	Test Date	2021/3/19

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	79.88	30.41 QP	40.00	-9.59	1.64 V	174	45.26	-14.85
2	95.65	28.47 QP	40.00	-11.53	1.00 V	51	43.51	-15.04
3	139.25	30.70 QP	40.00	-9.30	1.00 V	321	40.53	-9.83
4	154.00	29.83 QP	40.00	-10.17	1.00 V	310	38.97	-9.14
5	189.04	33.78 QP	40.00	-6.22	1.00 V	1	45.66	-11.88
6	222.08	34.27 QP	40.00	-5.73	1.00 V	107	46.06	-11.79
7	250.01	30.14 QP	47.00	-16.86	1.00 V	116	39.94	-9.80
8	324.15	36.49 QP	47.00	-10.51	1.00 V	159	43.47	-6.98
9	480.00	37.12 QP	47.00	-9.88	1.00 V	251	41.06	-3.94
10	500.00	32.99 QP	47.00	-14.01	1.00 V	292	36.47	-3.48
11	600.00	34.50 QP	47.00	-12.50	3.13 V	241	35.62	-1.12
12	924.00	39.91 QP	47.00	-7.09	2.23 V	198	34.19	5.72
13	960.00	36.80 QP	47.00	-10.20	2.16 V	1	30.53	6.27

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

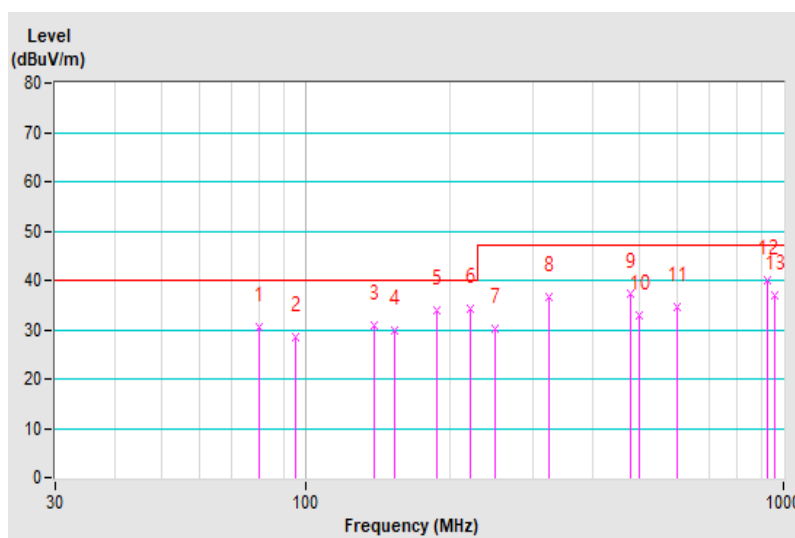

7.3 Radiated Emissions above 1 GHz


7.3.1 Test Mode 1

Frequency Range	1GHz ~ 14.5GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested By	Chin-Wen Wang	Environmental Conditions	23.0°C, 68.0%RH
Test Mode	Mode 1	Test Date	2021/3/24

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2309.85	57.34 PK	80.00	-22.66	1.17 H	276	56.37	0.97
2	2309.85	44.60 AV	60.00	-15.40	1.17 H	276	43.63	0.97
3	4979.27	51.48 PK	80.00	-28.52	1.94 H	185	45.60	5.88
4	4979.27	36.73 AV	60.00	-23.27	1.94 H	185	30.85	5.88
5	8005.27	55.31 PK	80.00	-24.69	2.31 H	29	44.54	10.77
6	8005.27	40.66 AV	60.00	-19.34	2.31 H	29	29.89	10.77
7	9988.75	56.23 PK	80.00	-23.77	1.42 H	348	44.42	11.81
8	9988.75	42.57 AV	60.00	-17.43	1.42 H	348	30.76	11.81

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

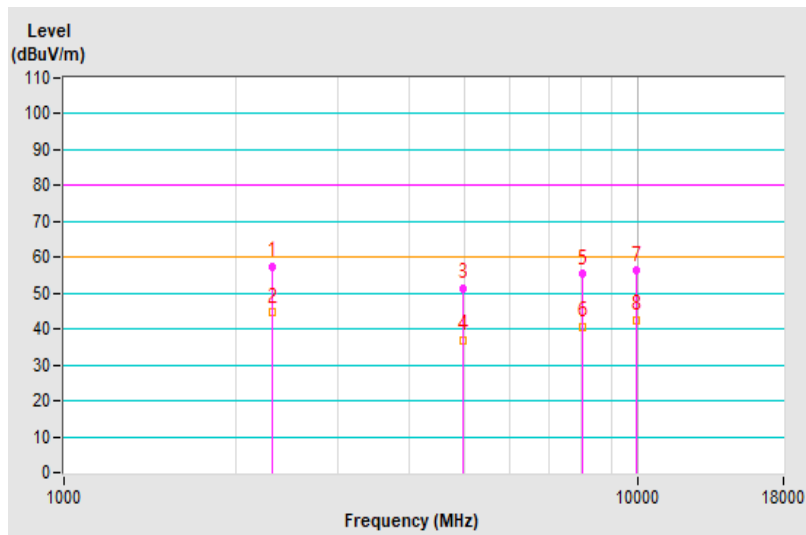




BUREAU
VERITAS

Frequency Range	1GHz ~ 14.5GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested By	Chin-Wen Wang	Environmental Conditions	23.0°C, 68.0%RH
Test Mode	Mode 1	Test Date	2021/3/24

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2309.85	59.73 PK	80.00	-20.27	2.29 V	304	58.76	0.97
2	2309.85	46.54 AV	60.00	-13.46	2.29 V	304	45.57	0.97
3	2761.20	59.28 PK	80.00	-20.72	1.27 V	190	57.84	1.44
4	2761.20	36.50 AV	60.00	-23.50	1.27 V	190	35.06	1.44
5	4997.55	53.45 PK	80.00	-26.55	1.75 V	301	47.52	5.93
6	4997.55	38.74 AV	60.00	-21.26	1.75 V	301	32.81	5.93
7	9972.60	56.51 PK	80.00	-23.49	1.08 V	257	44.64	11.87
8	9972.60	42.56 AV	60.00	-17.44	1.08 V	257	30.69	11.87

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

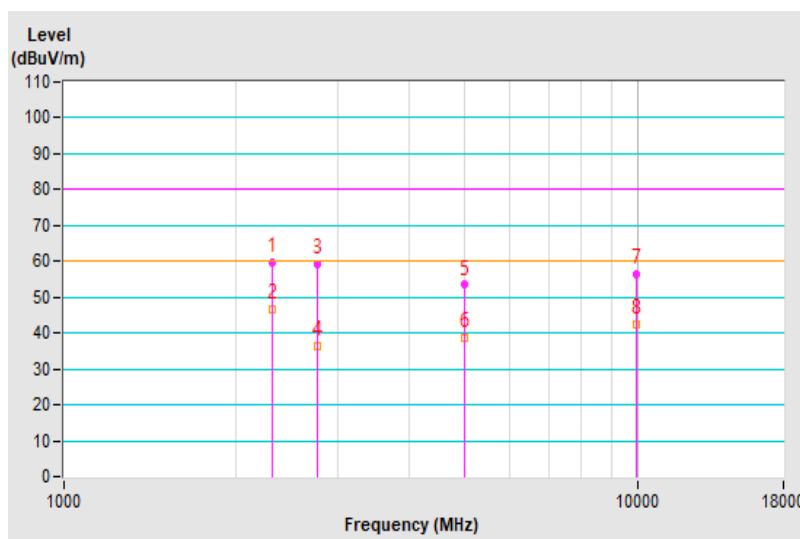

8 Pictures of Test Arrangements


8.1 Conducted Emissions from input power ports



8.2 Radiated Emissions up to 1 GHz



8.3 Radiated Emissions above 1 GHz

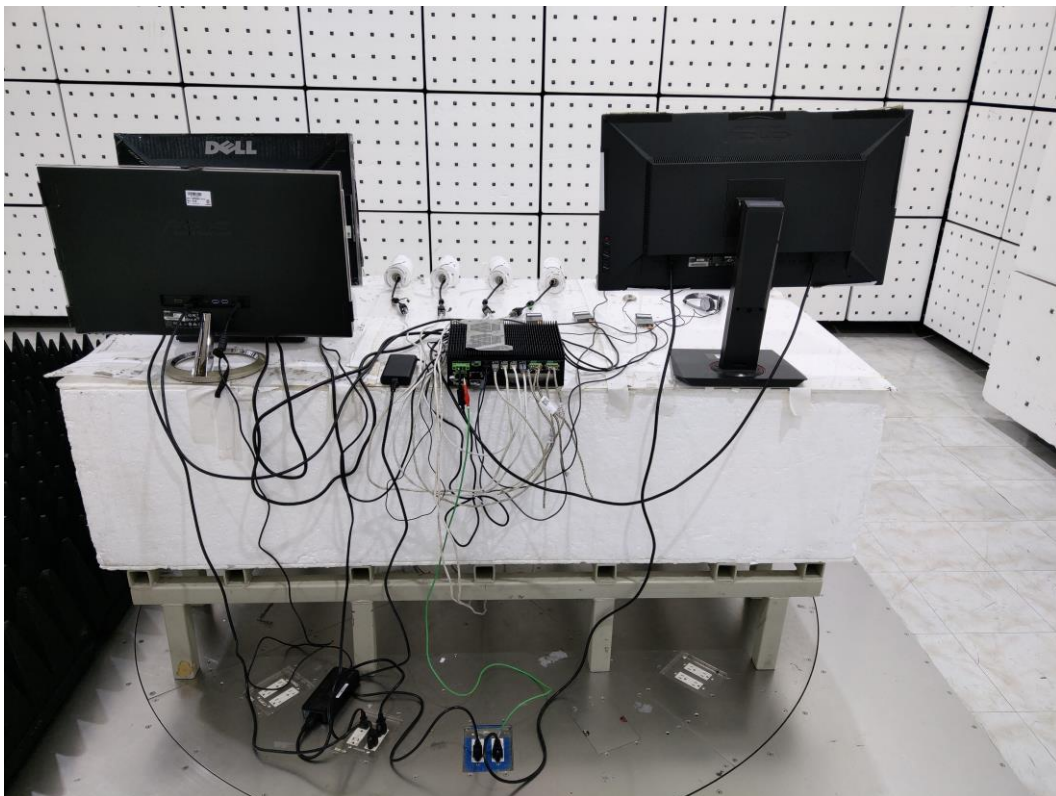



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---