



Report No.: T211203D01-D

Page: 1 / 32  
Rev.: 00

# FCC TEST REPORT

for

**MicroATX Mother Board**

**MODEL: UMBC-1100; UMBC-1XXXXXXXXXX("X" can be 0-9, A-Z or blank for marketing purpose)**

Issued to:

**Vecow Co.,Ltd**

**3F., No.10, Jiankang Rd., Zhonghe Dist.,  
New Taipei City 23686, Taiwan (R.O.C.)**

Issued by:

**Compliance Certification Services Inc.**

**Xindian Lab.**

**No.163-1, Jhongsheng Rd., Xindian Dist.,  
New Taipei City, Taiwan.**

**TEL: 886-2-22170894**

**FAX: 886-2-22171029**

**Issued Date: January 3, 2022**

**Note:** This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 3, 2022	Initial Issue	ALL	Linda Wu

## TABLE OF CONTENTS

<b>1</b>	<b>TEST RESULT CERTIFICATION</b> .....	<b>4</b>
<b>2</b>	<b>EUT DESCRIPTION</b> .....	<b>5</b>
<b>3</b>	<b>TEST METHODOLOGY</b> .....	<b>6</b>
3.1.	DECISION OF FINAL TEST MODE .....	6
3.2.	EUT SYSTEM OPERATION .....	6
<b>4</b>	<b>SETUP OF EQUIPMENT UNDER TEST</b> .....	<b>7</b>
4.1.	DESCRIPTION OF SUPPORT UNITS .....	7
4.2.	CONFIGURATION OF SYSTEM UNDER TEST .....	8
<b>5</b>	<b>FACILITIES AND ACCREDITATIONS</b> .....	<b>9</b>
5.1.	FACILITIES .....	9
5.2.	ACCREDITATIONS.....	9
5.3.	MEASUREMENT UNCERTAINTY .....	9
<b>6</b>	<b>CONDUCTED EMISSION MEASUREMENT</b> .....	<b>10</b>
6.1.	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	10
6.2.	TEST INSTRUMENTS .....	10
6.3.	TEST PROCEDURES .....	11
6.4.	TEST SETUP .....	12
6.5.	DATA SAMPLE .....	12
6.6.	TEST RESULTS .....	13
<b>7</b>	<b>RADIATED EMISSION MEASUREMENT</b> .....	<b>15</b>
7.1.	LIMITS OF RADIATED EMISSION MEASUREMENT .....	15
7.2.	TEST INSTRUMENTS .....	17
7.3.	TEST PROCEDURES .....	18
7.4.	TEST SETUP .....	19
7.5.	DATA SAMPLE .....	20
7.6.	TEST RESULTS .....	21
<b>8</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION</b> .....	<b>26</b>
	<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b> .....	<b>29</b>

Report No.: T211203D01-D

# 1 TEST RESULT CERTIFICATION

<b>Product:</b>	MicroATX Mother Board
<b>Model:</b>	UMBC-1100; UMBC-1XXXXXXXXXX("X" can be 0-9, A-Z or blank for marketing purpose)
<b>Brand:</b>	VECOW
<b>Applicant:</b>	<b>Vecow Co.,Ltd</b> 3F., No.10, Jiankang Rd., Zhonghe Dist., New Taipei City 23686, Taiwan (R.O.C.)
<b>Manufacturer:</b>	<b>Vecow Co.,Ltd</b> 3F., No.10, Jiankang Rd., Zhonghe Dist., New Taipei City 23686, Taiwan (R.O.C.)
<b>Tested:</b>	December 20, 2021

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7-2020 ANSI C63.4-2014	Conducted (Power Port)	PASS	Meet Class A limit
	Radiated	PASS	Meet Class A limit

Statements of Conformity
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.


The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Jason Lee  
Section Manager

Reviewed by:

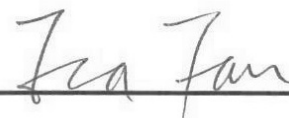

Eva Fan  
Supervisor of report document dept.

Report No.: T211203D01-D

## 2 EUT DESCRIPTION

<b>Product</b>	MicroATX Mother Board
<b>Brand Name</b>	VECOW
<b>Model</b>	UMBC-1100; UMBC-1XXXXXXXXXX("X" can be 0-9, A-Z or blank for marketing purpose)
<b>Applicant</b>	Vecow Co.,Ltd
<b>Housing material</b>	N/A
<b>Identify Number</b>	T211203D01
<b>Received Date</b>	December 3, 2021
<b>EUT Power Rating</b>	3.3VDC, 7.25A / ±5VDC, 0.58A / ±12VDC, 7.25A / 5VSB, 0.07A from Host PC Power Supply
<b>AC Power During Test</b>	120VAC / 60Hz & 230VAC / 60Hz to Host PC Power Supply

### Model Differences

Model Name	Difference	Tested (Checked)
UMBC-1100	Original	<input checked="" type="checkbox"/>
UMBC-1XXXXXXXXXX	1. "X" can be 0-9, A-Z or blank. 2. For marketing purpose only.	<input type="checkbox"/>

### I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
1. VGA Port	1	1
2. HDMI Port	1	1
3. Display Port	1	1
4. Microphone Port	1	1
5. Earphone Port	1	1
6. USB Port	6	6
7. LAN Port	4	4

**Note:** Client consigns only one model sample to test (Model Number: UMBC-1100).

Report No.: T211203D01-D

### 3 TEST METHODOLOGY

#### 3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the below additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The test configuration/ modes are as the following:

**Conduction Modes:**

1	DP Mode 4096*2160, 60Hz; HDMI Mode 3840*2160, 24Hz;	120VAC, 60Hz
2	VGA Mode 1920*1200, 60Hz	230VAC, 60Hz

**Radiation Modes:**

1	DP Mode 4096*2160, 60Hz; HDMI Mode 3840*2160, 24Hz; VGA Mode 1920*1200, 60Hz	120VAC, 60Hz
	DP Mode 4096*2160, 60Hz; HDMI Mode 3840*2160, 24Hz; VGA Mode 1920*1200, 60Hz / 1-10.5GHz	
2	DP Mode 4096*2160, 60Hz; HDMI Mode 3840*2160, 24Hz; VGA Mode 1920*1200, 60Hz	230VAC, 60Hz

**Worst:****Conduction:** Mode 1**Radiation:** Mode 1

#### 3.2. EUT SYSTEM OPERATION

1. Windows Server 10 boots system.
2. Run Burnintest.exe to activate all peripherals and display "H" pattern on monitor screen.
3. Run Lantest20.exe to ping 192.168.1.10 -t (EUT), ping 192.168.1.20 -t (EUT), ping 192.168.1.30 -t (EUT), ping 192.168.1.40 -t (EUT), ping 192.168.1.22 -t (Server Notebook).

**Note:** Test program is self-repeating throughout the test.

Report No.: T211203D01-D

## 4 SETUP OF EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Host PC Devices:

No.	Equipment	Model No.	Brand Name
1	CPU (2.1GHz)	i5-8500T	Intel
2	Memory (4GB, DDR4-2400)	N/A	kingston
3	Storage(1TB)	SSD 3TG6-P	innodisk
4	Power Supply	EMG600AWT	EnerMax


#### Peripherals Devices:

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Brand Name	Data Cable	Power Cord
1	Earphone & Microphone	X710	N/A	N/A	HAWK	Unshielded, 1.8m	N/A
2-5	USB HDD	TS1TSJ25MC	N/A	BSMI: D33193	Transcend	Shielded, 1.4m	N/A
6	USB Mouse	M-U0026	N/A	BSMI: T41126	Logitech	Shielded, 1.5m	N/A
7	USB Keyboard	Y-U0011	N/A	BSMI: D51160	Logitech	Shielded, 1.5m	N/A
8	Monitor	U2718Qb	CN-0M5R5F-QD C00-9CL-0CVL- A10	BSMI: R43002	DELL	Shielded, 2.0m	Unshielded, 1.8m
9	Monitor	PA248Q	G5LMQS071170	BSMI: R31018	ASUS	Shielded, 1.5m with two cores	Unshielded, 1.8m
10	Monitor	VP2780-4K	N/A	BSMI: R31374	ViewSonic	Shielded, 2.0m	Unshielded, 1.8m
11	Hub	GS-108B v3	S184305016657	BSMI: D41163	ZYXEL	Unshielded, 2m*4	Unshielded, 1.8m
12	Server PC	T3610	57TT032	BSMI: R33002	DELL	Unshielded, 20m	Unshielded, 1.8m

#### Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.2. CONFIGURATION OF SYSTEM UNDER TEST

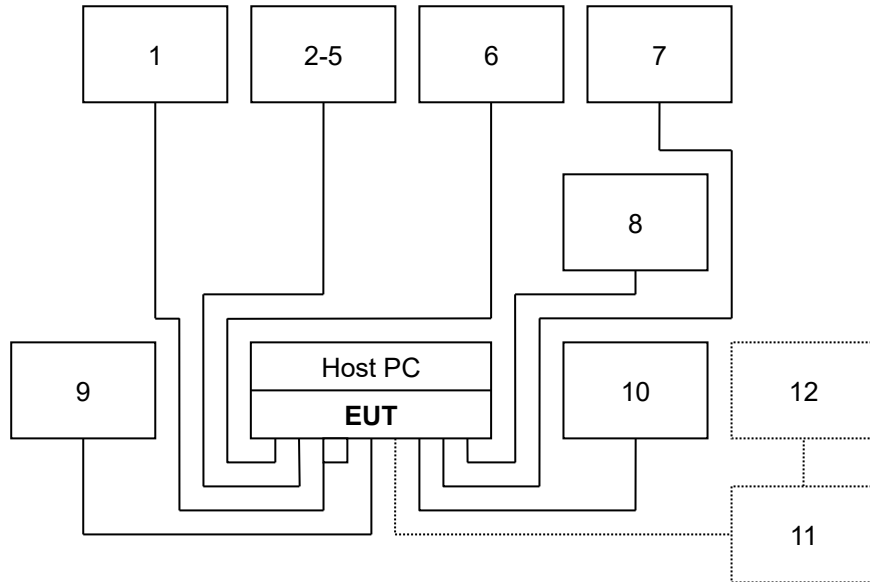



Report No.: T211203D01-D

## 5 FACILITIES AND ACCREDITATIONS

### 5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCSrf Taiwan Xindian Lab. at No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, Taiwan.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

### 5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

**Taiwan** TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	Industry Canada
<b>Japan</b>	VCCI
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	0.15MHz ~ 30MHz	± 2.8
Radiated emissions	30MHz ~ 1000MHz	± 5.2
	1000MHz ~ 18000MHz	± 4.6
	18000MHz ~ 40000MHz	± 3.8

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2005, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.8dB(AMN); 5.2dB(OATS) and 5.5dB(1-18GHz) respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.

Report No.: T211203D01-D

## 6 CONDUCTED EMISSION MEASUREMENT

### 6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBUV)		Class B (dBUV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 6.2. TEST INSTRUMENTS

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Pulse Limiter	Schwarzbeck	VTSD 9561-F	BNC#211	03/23/2022
BNC CABLE	EMEC	EMG178	BNC#A9	03/23/2022
EMI Test Receiver	R&S	ESCI	100234	05/03/2022
LISN	Schwarzbeck	NNLK 8129	8129-286	07/20/2022
LISN(EUT)	Schwarzbeck	NSLK 8127	8127527	07/20/2022
Thermo-Hygro Meter	Wisewind	201A	SD-C017	04/12/2022
Test S/W	EZ-EMC			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.

## 6.3. TEST PROCEDURES

### Procedure of Preliminary Test


- The EUT and support equipment, if needed, were set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The test equipment EUT installed by AC main power, through a Line Impedance Stabilization Network (LISN), which was supplied power source and was grounded to the ground plane.
- All support equipment power by from a second LISN.
- The test program of the EUT was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

### Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

Report No.: T211203D01-D

## 6.4. TEST SETUP

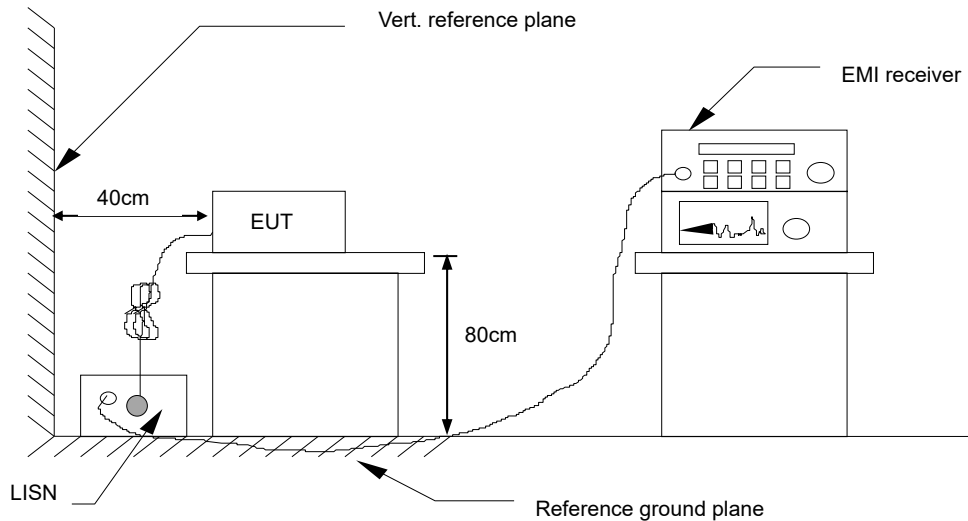

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 6.5. DATA SAMPLE

Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	73	-29.50	Q	L1


- Freq. = Emission frequency in MHz
- Reading = Uncorrected Analyzer/Receiver reading
- Factor = Insertion loss of LISN + Cable Loss + Pulse Limit
- Result = Reading + Factor
- Limit = Limit stated in standard
- Margin = Reading in reference to limit
- P = Peak Reading
- Q = Quasi-peak Reading
- A = Average Reading
- L1 = Hot side
- L2 = Neutral side

### Calculation Formula

$$\text{Margin (dB)} = \text{Result (dBuV)} - \text{Limit (dBuV)}$$

## 6.6. TEST RESULTS

<b>Model No.</b>	UMBC-1100	<b>6dB Bandwidth</b>	9 kHz
<b>Environmental Conditions</b>	23.8°C, 58% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Jim Lian	<b>Phase</b>	L1
<b>Standard</b>	FCC CLASS A / ICES-003 CLASS A		

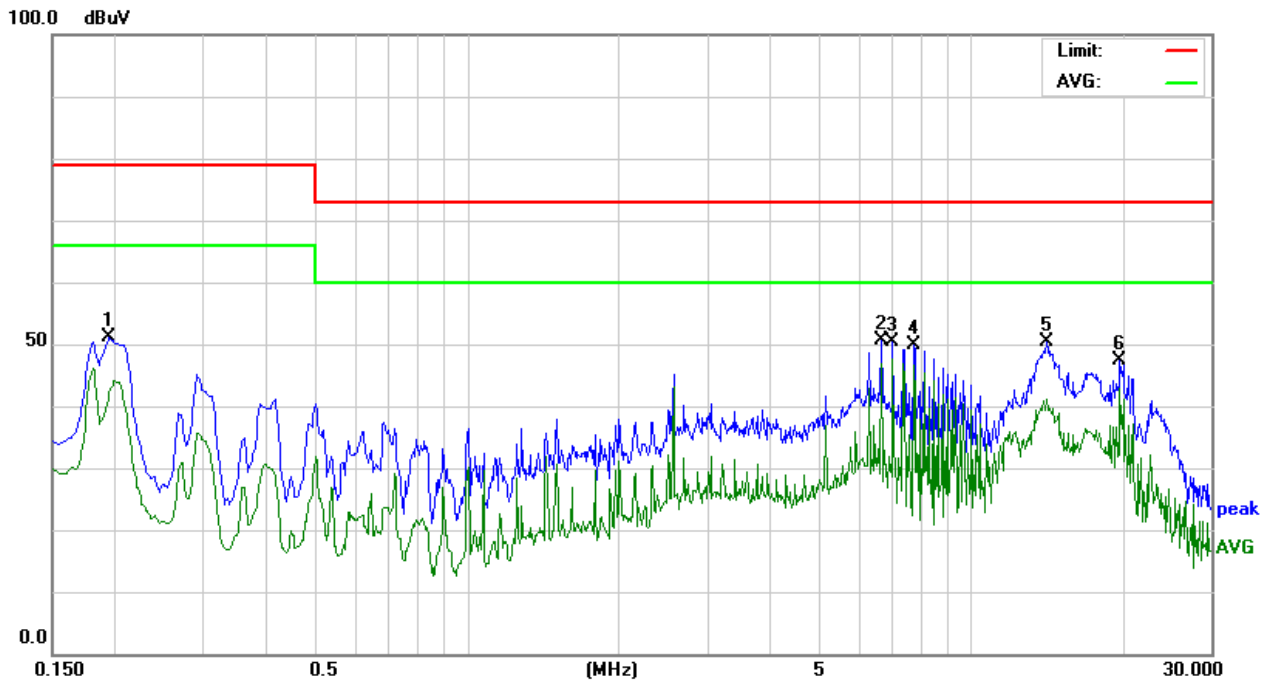


Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1949	41.43	9.72	51.15	79.00	-27.85	P	L1
6.6480	40.39	10.15	50.54	73.00	-22.46	P	L1
7.0035	40.23	10.17	50.40	73.00	-22.60	P	L1
7.7235	39.71	10.20	49.91	73.00	-23.09	P	L1
14.1675	39.95	10.43	50.38	73.00	-22.62	P	L1
19.7700	36.85	10.58	47.43	73.00	-25.57	P	L1

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Report No.: T211203D01-D

<b>Model No.</b>	UMBC-1100	<b>6dB Bandwidth</b>	9 kHz
<b>Environmental Conditions</b>	23.8°C, 58% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Jim Lian	<b>Phase</b>	L2
<b>Standard</b>	FCC CLASS A / ICES-003 CLASS A		

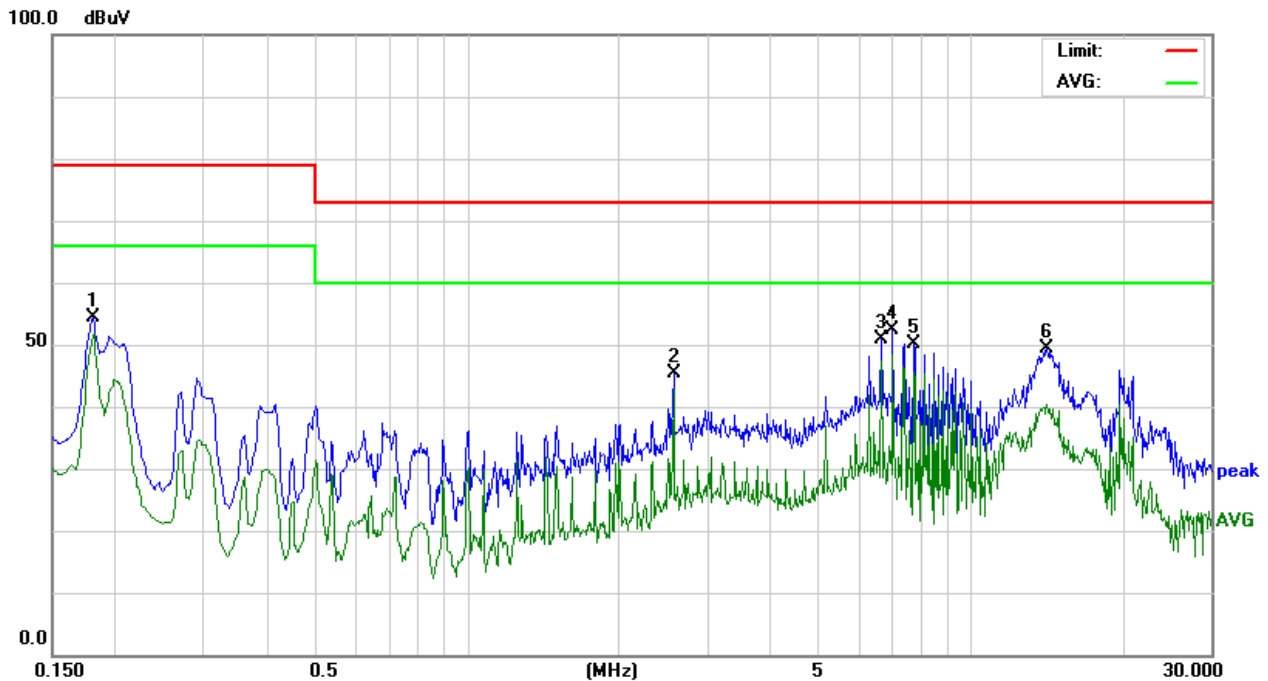

Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1815	44.80	9.70	54.50	79.00	-24.50	P	L2
2.5710	35.44	9.90	45.34	73.00	-27.66	P	L2
6.6480	40.72	10.06	50.78	73.00	-22.22	P	L2
7.0034	42.38	10.07	52.45	73.00	-20.55	P	L2
7.7235	40.12	10.09	50.21	73.00	-22.79	P	L2
14.1720	39.15	10.31	49.46	73.00	-23.54	P	L2

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Report No.: T211203D01-D

## 7 RADIATED EMISSION MEASUREMENT

### 7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

#### FCC 47 CFR Part 15 Subpart B

#### Below 1GHz (for digital device)

FREQUENCY (MHz)	dBuV/m (At 10m)	
	Class A	Class B
30 ~ 230	40	30
230 ~ 1000	47	37

#### Limit tables for non-digital device:

#### Class A Radiated Emission limit at 10m (for others)

Frequency (MHz)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	90	39
88 - 216	150	43.5
216 - 960	210	46.4
Above 960	300	49.5

#### Class B Radiated Emission limit at 3m (for others)

Frequency (MHz)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### Above 1GHz(for all device)

Frequency (MHz)	Class A (dBuV/m) (At 10m)		Class B (dBuV/m) (At 3m)	
	Average	Peak	Average	Peak
Above 1000	49.5	69.5	54	74

- NOTE:** (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) The measurement above 1GHz is at close-in distances 3m, and determine the limit **L2** corresponding to the close-in distance **d2** by applying the following relation: **L2 = L1 (d1/d2)**, where **L1** is the specified limit in microvolts per metre (**uV/m**) at the distance **d1 (10m)**, **L2** is the new limit for distance **d2 (3m)**.  
 So the new Class A limit above 1GHz at 3m is as following table:

Frequency (MHz)	Class A (dBuV/m) (At 3m)	
	Average	Peak
Above 1000	60	80

Report No.: T211203D01-D

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

### ICES-003 Issue 7-2020

#### Below 1GHz

##### Class A Radiated Emission limit

Frequency (MHZ)	(dBuV/m)Q.P. Distances (3m)	(dBuV/m)Q.P. Distances (10m)
30 - 88	50	40
88 - 216	54	43.5
216 - 230	56.9	46.4
230 - 960	57	47
960 - 1000	60	49.5

##### Class B Radiated Emission limit

Frequency (MHZ)	(dBuV/m)Q.P. Distances (3m)	(dBuV/m)Q.P. Distances (10m)
30 - 88	40	30
88 - 216	43.5	33.1
216 - 230	46	35.6
230 - 960	47	37
960 - 1000	54	43.5



Report No.: T211203D01-D

### Above 1GHz

Frequency (MHZ)	Class A (dBuV/m) (At 3m)		Class B (dBuV/m) (At 3m)	
	Average	Peak	Average	Peak
Above 1000	60	80	54	74

### Required highest measurement frequency for radiated emissions

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Fx-108	1000
108-500	2000
500-1000	5000
Above 1000	5 x FX up to a maximum of 40 GHz

**Note:** Fx is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

## 7.2. TEST INSTRUMENTS

Open Area Test Site # H				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Bilog Antenna	Teseq	CBL 6112D	40529	09/22/2022
Cable	EMEC	CFD400E-LW	SD-R074	08/11/2022
EMI Test Receiver	R&S	ESCI	101340	02/25/2022
Pre-Amplifier	HP	8447D	1937A01554	09/23/2022
Thermo-Hygro Meter	Wisewind	201A	No. 03	05/19/2022
Test S/W	EZ-EMC			
Chamber #E (Above 1GHz Used)				
Horn Antenna	ETS	3117	00139062	07/13/2022
Microflex Cable x 7m	EMCI	EMC107-NM-NM-7000	SD-R072	07/27/2022
K-Type Cable x 1m	EMCI	EMC101G-KM-KM-1000	200702	07/04/2022
Pre-Amplifier	Com-Power	PAM-118A	551041	07/06/2022
Signal Analyzer	R&S	FSV40	101269	07/05/2022
Thermo-Hygro Meter	Wisewind	201A	SD-R046	08/09/2022
Test S/W	EZ-EMC			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.

Report No.: T211203D01-D

## 7.3. TEST PROCEDURES

### Procedure of Preliminary Test


- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

### Procedure of Final Test


- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 40GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 or 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recording at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.

## 7.4. TEST SETUP

### Below 1GHz

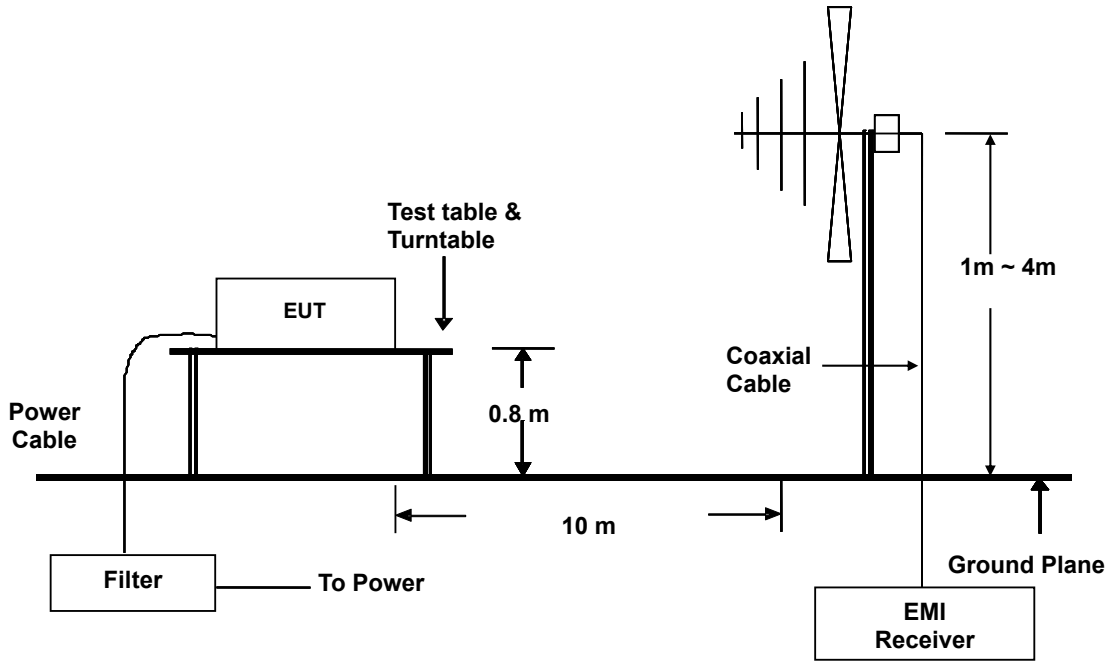

### Above 1GHz

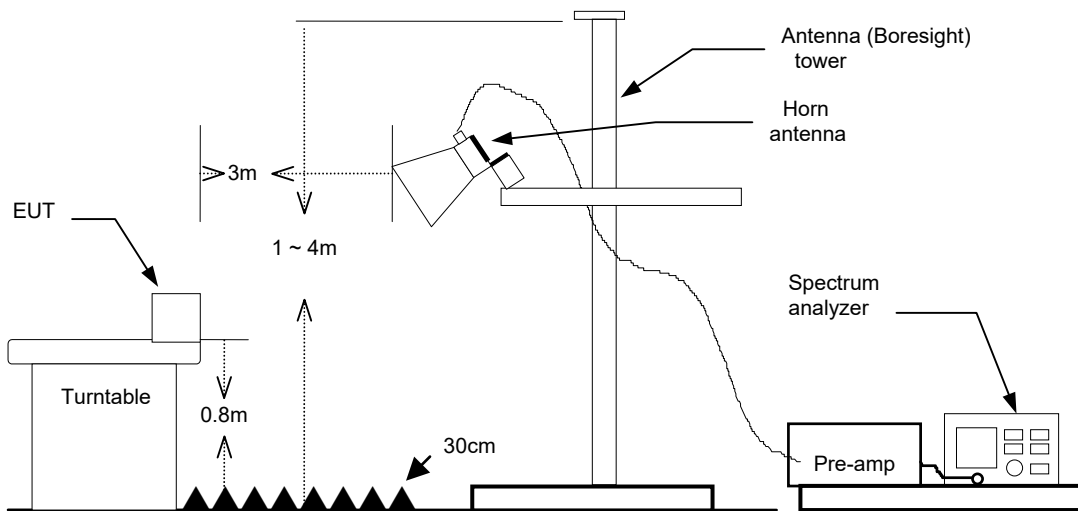

- For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

Report No.: T211203D01-D

## 7.5. DATA SAMPLE

### Below 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)
x.xx	14.0	12.2	26.2	40	-13.8	Q	H

### Above 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
x.xx	42.95	0.55	43.50	60	-16.50	A	H

- Freq. = Emission frequency in MHz  
 Reading = Uncorrected Analyzer/Receiver reading  
 Factor = Antenna Factor + Cable Loss - Amplifier Gain  
 Result = Reading + Factor  
 Limit = Limit stated in standard  
 Margin = Reading in reference to limit  
 P = Peak Reading  
 Q = Quasi-peak Reading  
 A = Average Reading  
 H = Antenna Polarization: Horizontal  
 V = Antenna Polarization: Vertical

### Calculation Formula


Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)

Report No.: T211203D01-D

## 7.6. TEST RESULTS

FCC 47 CFR Part 15 Subpart B  
Below 1GHz


<b>Model No.</b>	UMBC-1100	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	23.3°C, 64% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Jim Lian
<b>Standard</b>	FCC CLASS A W/ CISPR 22 CLASS A LIMIT		

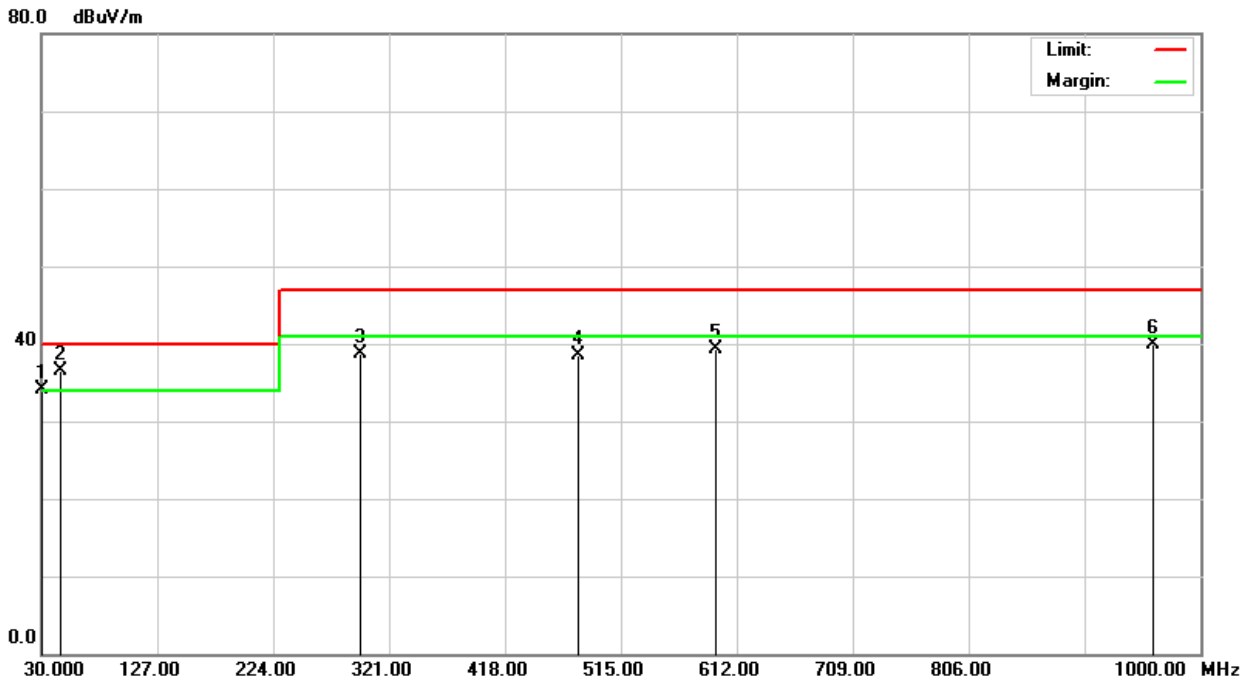

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
30.3200	36.60	-2.46	34.14	40.00	-5.86	100	238	Q	V
46.2000	47.70	-11.12	36.58	40.00	-3.42	100	91	Q	V
296.7100	44.80	-6.09	38.71	47.00	-8.29	100	155	Q	V
480.0100	39.70	-1.21	38.49	47.00	-8.51	400	274	Q	V
593.9440	38.80	0.53	39.33	47.00	-7.67	400	340	Q	V
960.0120	35.30	4.67	39.97	47.00	-7.03	400	126	Q	V

**Note:** 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.  
2. P= Peak Reading; Q= Quasi-peak Reading.

<b>Model No.</b>	UMBC-1100	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	23.3°C, 64% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Jim Lian
<b>Standard</b>	FCC CLASS A W/ CISPR 22 CLASS A LIMIT		

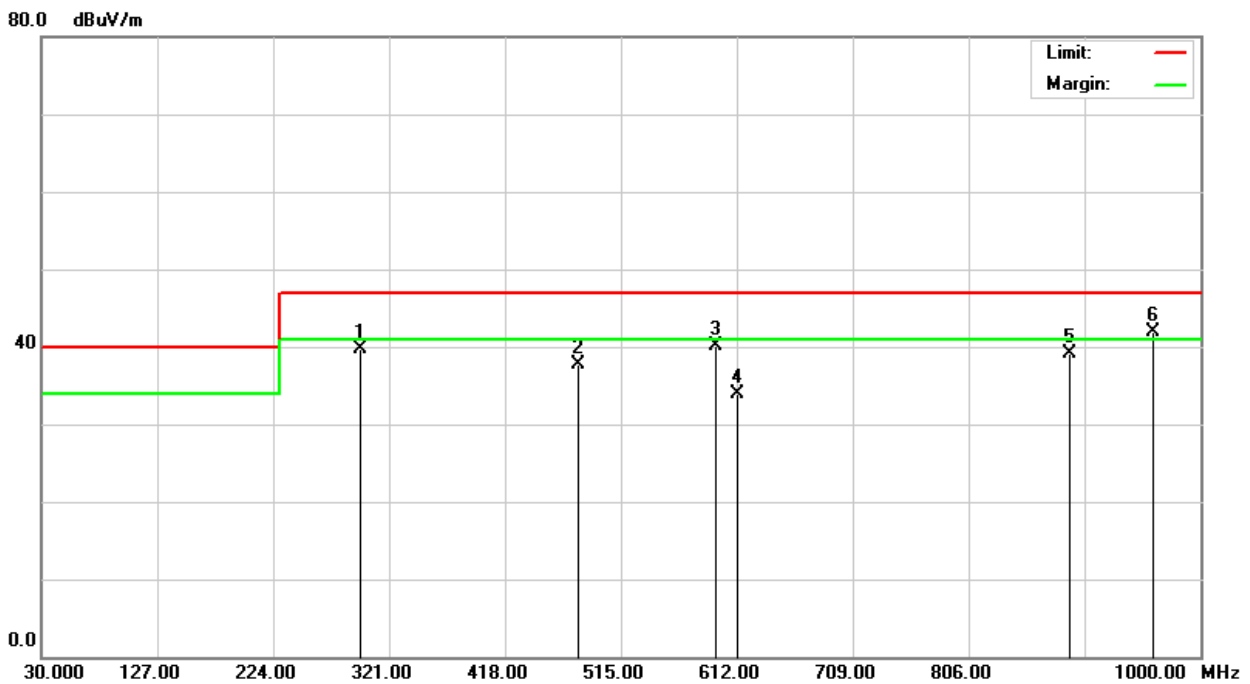

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
297.7120	45.70	-6.08	39.62	47.00	-7.38	400	166	Q	H
480.0120	38.90	-1.21	37.69	47.00	-9.31	100	298	Q	H
593.9600	39.60	0.53	40.13	47.00	-6.87	100	352	Q	H
613.2400	33.10	0.87	33.97	47.00	-13.03	100	57	Q	H
890.1280	35.20	3.95	39.15	47.00	-7.85	100	182	Q	H
960.0800	37.20	4.67	41.87	47.00	-5.13	100	68	Q	H


**Note:** 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.  
2. P= Peak Reading; Q= Quasi-peak Reading.

Report No.: T211203D01-D

**ICES-003 Issue 7-2020**

**Below 1GHz**

<b>Model No.</b>	UMBC-1100	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	23.3°C, 64% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Jim Lian
<b>Standard</b>	ICES-003 CLASS A		

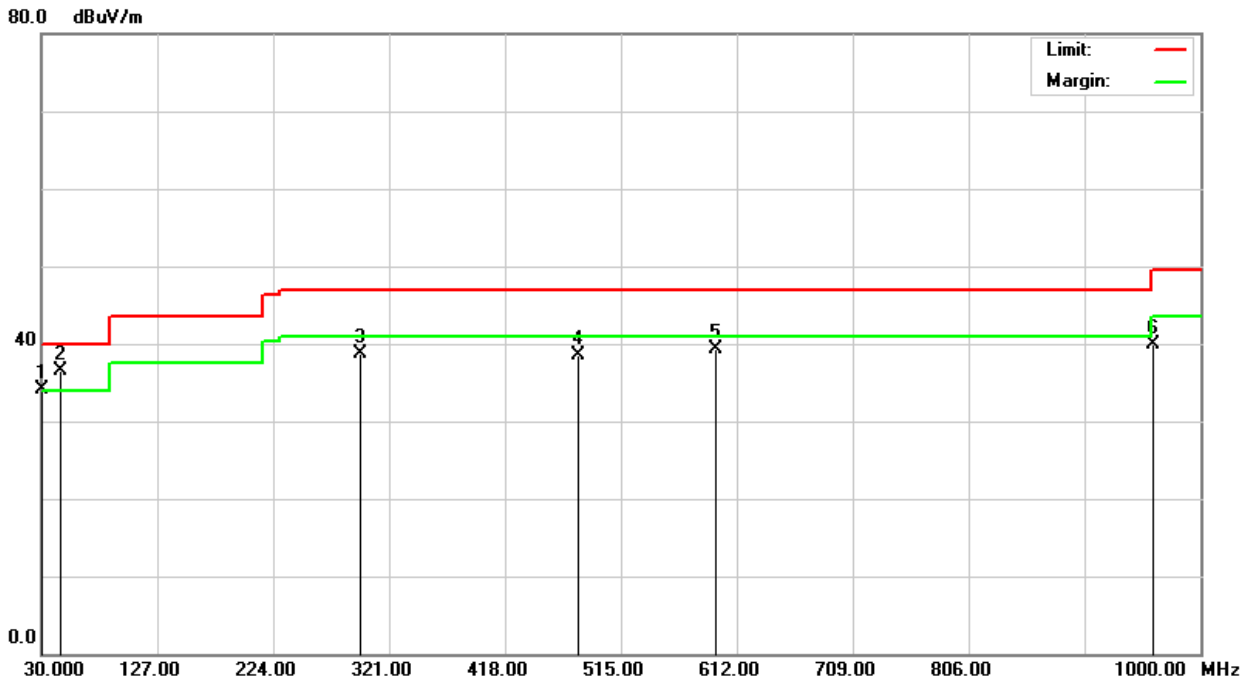


Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
30.3200	36.60	-2.46	34.14	40.00	-5.86	100	238	Q	V
46.2000	47.70	-11.12	36.58	40.00	-3.42	100	91	Q	V
296.7100	44.80	-6.09	38.71	47.00	-8.29	100	155	Q	V
480.0100	39.70	-1.21	38.49	47.00	-8.51	400	274	Q	V
593.9440	38.80	0.53	39.33	47.00	-7.67	400	340	Q	V
960.0120	35.30	4.67	39.97	49.50	-9.53	400	126	Q	V

Note: P= Peak Reading; Q= Quasi-peak Reading.

Report No.: T211203D01-D

<b>Model No.</b>	UMBC-1100	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	23.3°C, 64% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Jim Lian
<b>Standard</b>	ICES-003 CLASS A		

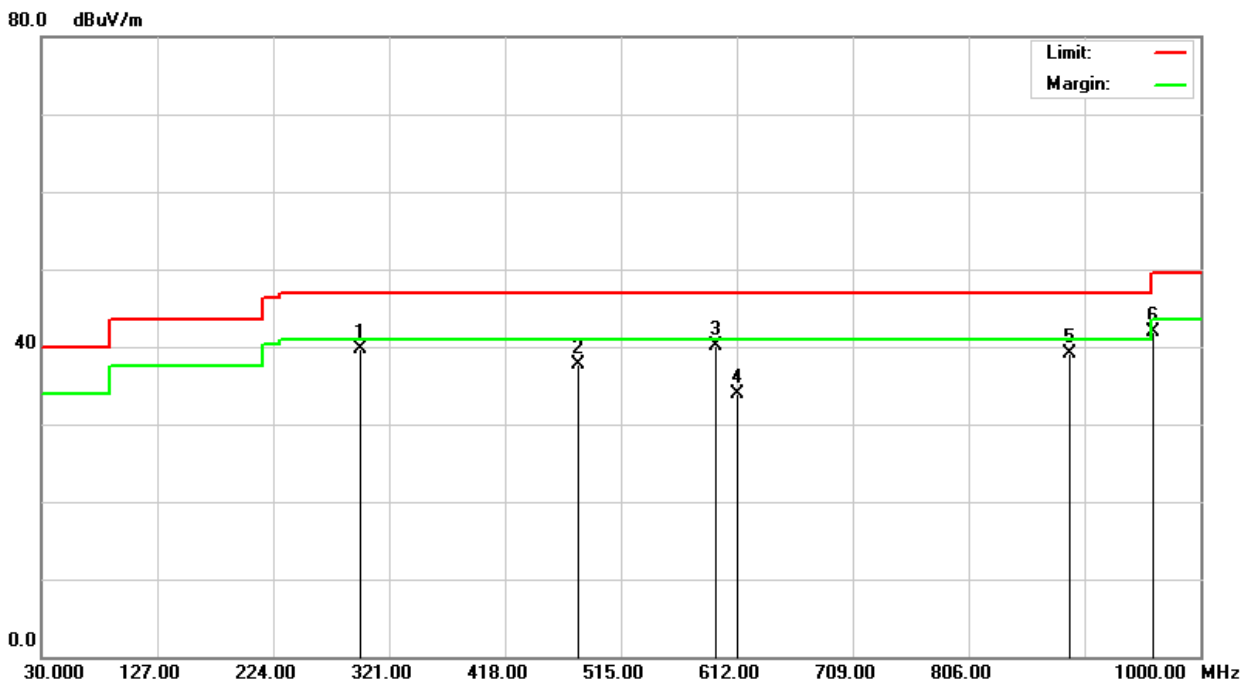

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
297.7120	45.70	-6.08	39.62	47.00	-7.38	400	166	Q	H
480.0120	38.90	-1.21	37.69	47.00	-9.31	100	298	Q	H
593.9600	39.60	0.53	40.13	47.00	-6.87	100	352	Q	H
613.2400	33.10	0.87	33.97	47.00	-13.03	100	57	Q	H
890.1280	35.20	3.95	39.15	47.00	-7.85	100	182	Q	H
960.0800	37.20	4.67	41.87	49.50	-7.63	100	68	Q	H

Note: P= Peak Reading; Q= Quasi-peak Reading.



Report No.: T211203D01-D

**Above 1GHz**

<b>Model No.</b>	UMBC-1100	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	25.3°C, 65% RH	<b>6dB Bandwidth</b>	1 MHz
<b>Antenna Pole</b>	Vertical / Horizontal	<b>Antenna Distance</b>	3m
<b>Highest frequency generated or used</b>	2100MHz	<b>Upper frequency</b>	10500MHz
<b>Detector Function</b>	Peak and average.	<b>Tested by</b>	Lion Lee
<b>Standard</b>	FCC CLASS A / ICES-003 CLASS A		

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1240.000	64.12	-8.66	55.46	80.00	-24.54	P	V
1480.000	59.59	-9.14	50.45	80.00	-29.55	P	V
2740.000	57.90	-4.83	53.07	80.00	-26.93	P	V
3750.000	53.94	-3.58	50.36	80.00	-29.64	P	V
4150.000	54.70	-3.95	50.75	80.00	-29.25	P	V
4750.000	57.69	-2.14	55.55	80.00	-24.45	P	V

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1000.0000	63.09	-8.66	54.43	80.00	-25.57	P	H
1180.000	62.03	-8.56	53.47	80.00	-26.53	P	H
1780.000	60.69	-6.82	53.87	80.00	-26.13	P	H
2490.000	60.18	-4.93	55.25	80.00	-24.75	P	H
3590.000	57.34	-4.29	53.05	80.00	-26.95	P	H
4750.000	58.80	-2.14	56.66	80.00	-23.34	P	H

Note: 1. P= Peak Reading; A= Average Reading.


## 8 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



## RADIATED EMISSION TEST (Below 1GHz)



## RADIATED EMISSION TEST (Above 1GHz)

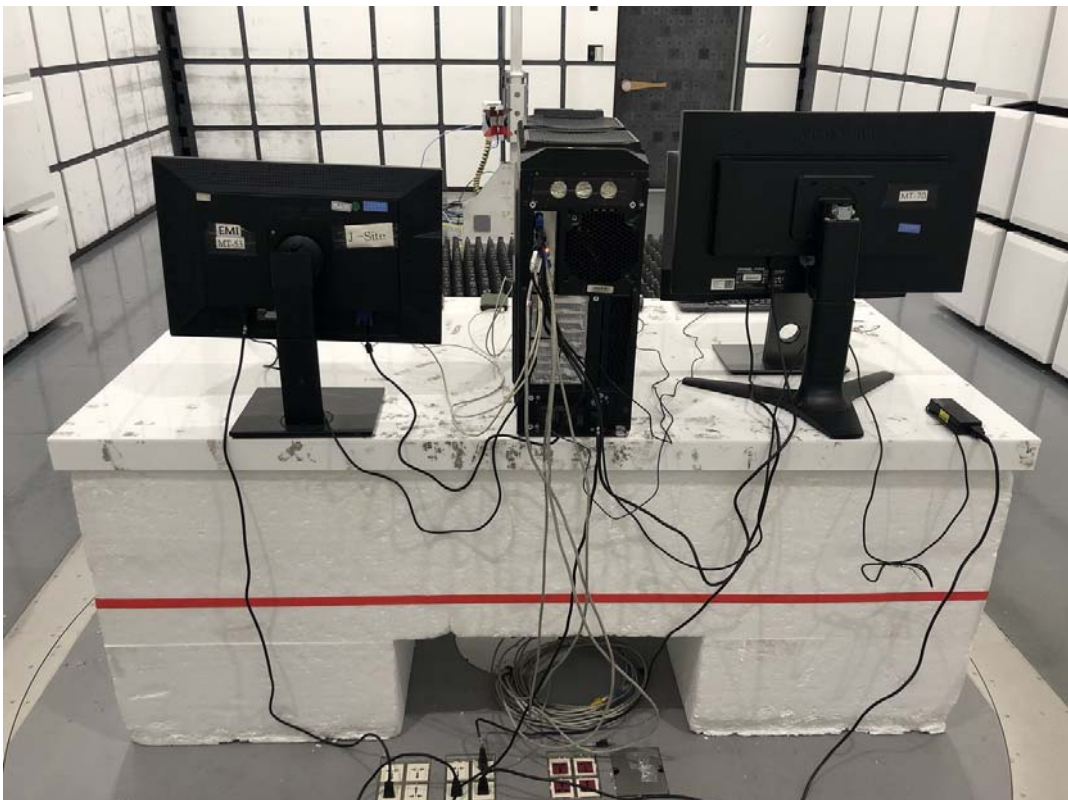

## APPENDIX 1 - PHOTOGRAPHS OF EUT





